



Wall Pack Half Round



Description

The Wall Pack Half Round (LL-WPHR) provides multiple wattages of down light. Featuring high performance LEDs and a long lasting driver, this fixture provides effective lighting all around. It can be used around retail malls, restaurants, dealerships, shopping centers, and hospitality.

Fixture Information

Size:	25W/45W/65 SELECTABLE
Housing:	Die cast aluminum body
Lens:	Glass
Finish:	UV Stabilized Powder coated finish
Color:	Standard: Bronze (BZ) Black (BK) White (WH) Grey (GY) Custom options available
CRI:	80
THD:	<20%
Power Factor:	.90
Dimming:	Standard: 0-10V
Voltage:	Standard: 120-277V
Operating Temperature:	-40°F to 104°F
Warranty:	10 Year Warranty

Performance Data

Lumen Output:

3085 to 8567 lm

Lumens Per Watt (typical):

122 - 145 lm/W

CCT:

3000K

4000K

5000K

Distribution:

Wide Throw

Forward Throw

Ratings & Certificates

UL & cUL Listed


Title 24 Compliant





Dimensions

Item	Width	Height	Length
15W/30W/50W/72W	9.25"	7.1"	18.1"

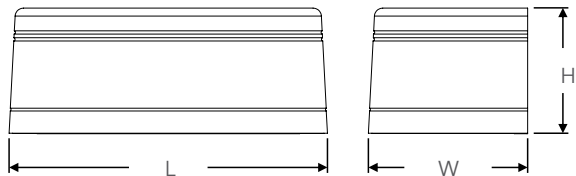

Performance Data


	25W			45W			65W		
CCT	Lumens	Watts	Efficacy	Lumens	Watts	Efficacy	Lumens	Watts	Efficacy
3000K	3085	25.3	122	5771.9	44.4	130	7854.9	65.4	121.8
4000K	3364.9	24.7	136.1	6295.7	43.4	145	8567.7	63.1	136
5000K	3139	25.5	123.1	5873.1	44.8	131.2	7992.6	63.1	122.9

Photometrics

72W Forward Throw

Lum. Classification System (LCS)


LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	1435.7	17.7	17.7
FM (30-60)	3152.4	38.9	38.9
FH (60-80)	1074.1	13.2	13.2
FVH (80-90)	75.5	0.9	0.9
BL (0-30)	1025.2	12.6	12.6
BM (30-60)	1117.1	13.8	13.8
BH (60-80)	187.0	2.3	2.3
BVH (80-90)	11.4	0.1	0.1
UL (90-100)	4.4	0.1	0.1
UH (100-180)	24.0	0.3	0.3
Total	8106.8	99.9	100.0
BUG Rating	B3-U2-G1		




72W Wide Throw

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	1530.1	17.7	17.7
FM (30-60)	3359.8	38.9	38.9
FH (60-80)	1144.7	13.2	13.2
FVH (80-90)	80.5	0.9	0.9
BL (0-30)	1092.6	12.6	12.6
BM (30-60)	1190.6	13.8	13.8
BH (60-80)	199.3	2.3	2.3
BVH (80-90)	12.1	0.1	0.1
UL (90-100)	4.7	0.1	0.1
UH (100-180)	25.6	0.3	0.3
Total	8640.0	99.9	100.0
BUG Rating	B3-U2-G1		



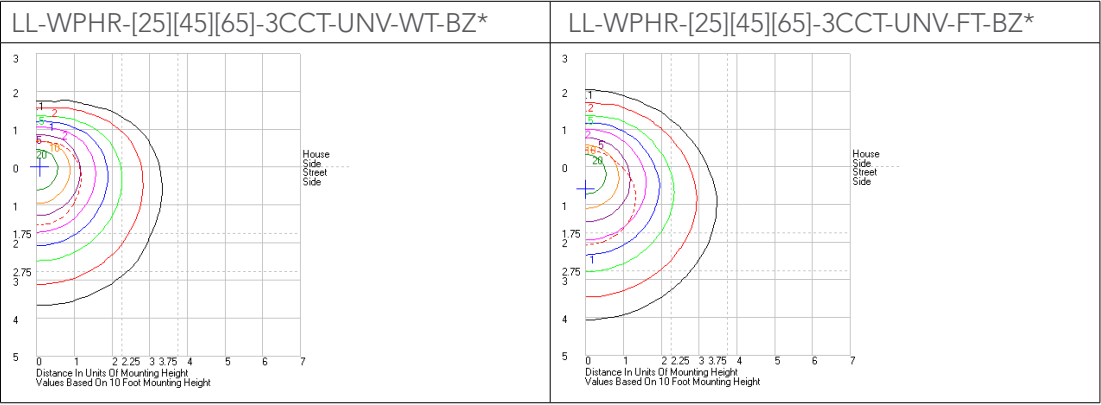

*Shown in 5000K



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Distribution	Finish
LL-WPHR-[25][45][65]-3CCT-UNV-FT-BZ	25W/45W/65W	3364/6295/8567	3000K 4000K 5000K	120-277	Forward Throw	Bronze
LL-WPHR-[25][45][65]-3CCT-UNV-WT-BZ	25W/45W/65W	3364/6295/8567	3000K 4000K 5000K	120-277	Wide Throw	Bronze
LL-WPHR-[25][45][65]-3CCT-UNV-FT-BK	25W/45W/65W	3364/6295/8567	3000K 4000K 5000K	120-277	Forward Throw	Black
LL-WPHR-[25][45][65]-3CCT-UNV-WT-BK	25W/45W/65W	3364/6295/8567	3000K 4000K 5000K	120-277	Wide Throw	Black
LL-WPHR-[25][45][65]-3CCT-UNV-FT-WH	25W/45W/65W	3364/6295/8567	3000K 4000K 5000K	120-277	Forward Throw	White
LL-WPHR-[25][45][65]-3CCT-UNV-WT-WH	25W/45W/65W	3364/6295/8567	3000K 4000K 5000K	120-277	Forward Throw	White
LL-WPHR-[25][45][65]-3CCT-UNV-FT-GY	25W/45W/65W	3364/6295/8567	3000K 4000K 5000K	120-277	Forward Throw	Grey
LL-WPHR-[25][45][65]-3CCT-UNV-WT-GY	25W/45W/65W	3364/6295/8567	3000K 4000K 5000K	120-277	Wide Throw	Grey

* Please contact LITELUME for all Custom Option Requests

Accessories Ordering Information

Part #	Description
PC	Button Photocell, 120-277V
OC	Occupancy Sensor With Dimming
EM	Emergency Battery Back Up 8W *Title 20 Compliant
EMC7	Emergency Battery Back Up Cold Weather 7W -4 °F To 140°F
EMC15	Emergency Battery Backup Cold Weather 15W -4 °F To 140°F
SS	10kv Surge