



Bollard Royal

IP66



Description

The LITELUME™ Bollard Royal (LL-BLROY) is a high performance LED solution 100% Made in USA meeting BABA Build America Buy America.

Fixture Information

Size:	10W/15W/20W/30W
Housing:	Aluminum Head with Extruded Aluminum Body.
Finish:	Super Durable Polyester Powder Coat Finish. Custom Finishes Available, Including Patinas and All RAL Colors.
Color:	Bronze (BZ) Black (BK) White (WH) Gray (GY) Green (GR) Silver Metallic (SM) Custom Color (CUS) Textured (T)
Voltage:	120-277V Universal 347-480V Universal
Controls:	Button Eye Photocell
Options:	House Side Shield
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

964 to 3,734 lm

CCT:

3000K
4000K
5000K

Distribution:

II, III, IV, V

Ratings & Certificates


ETL Listed for Wet Location
IP66





Dimension

Item	Height	Diameter	Head
Round	43"	5"	8"
Squared	43"	5"	6"
Angled	43"	5"	6"


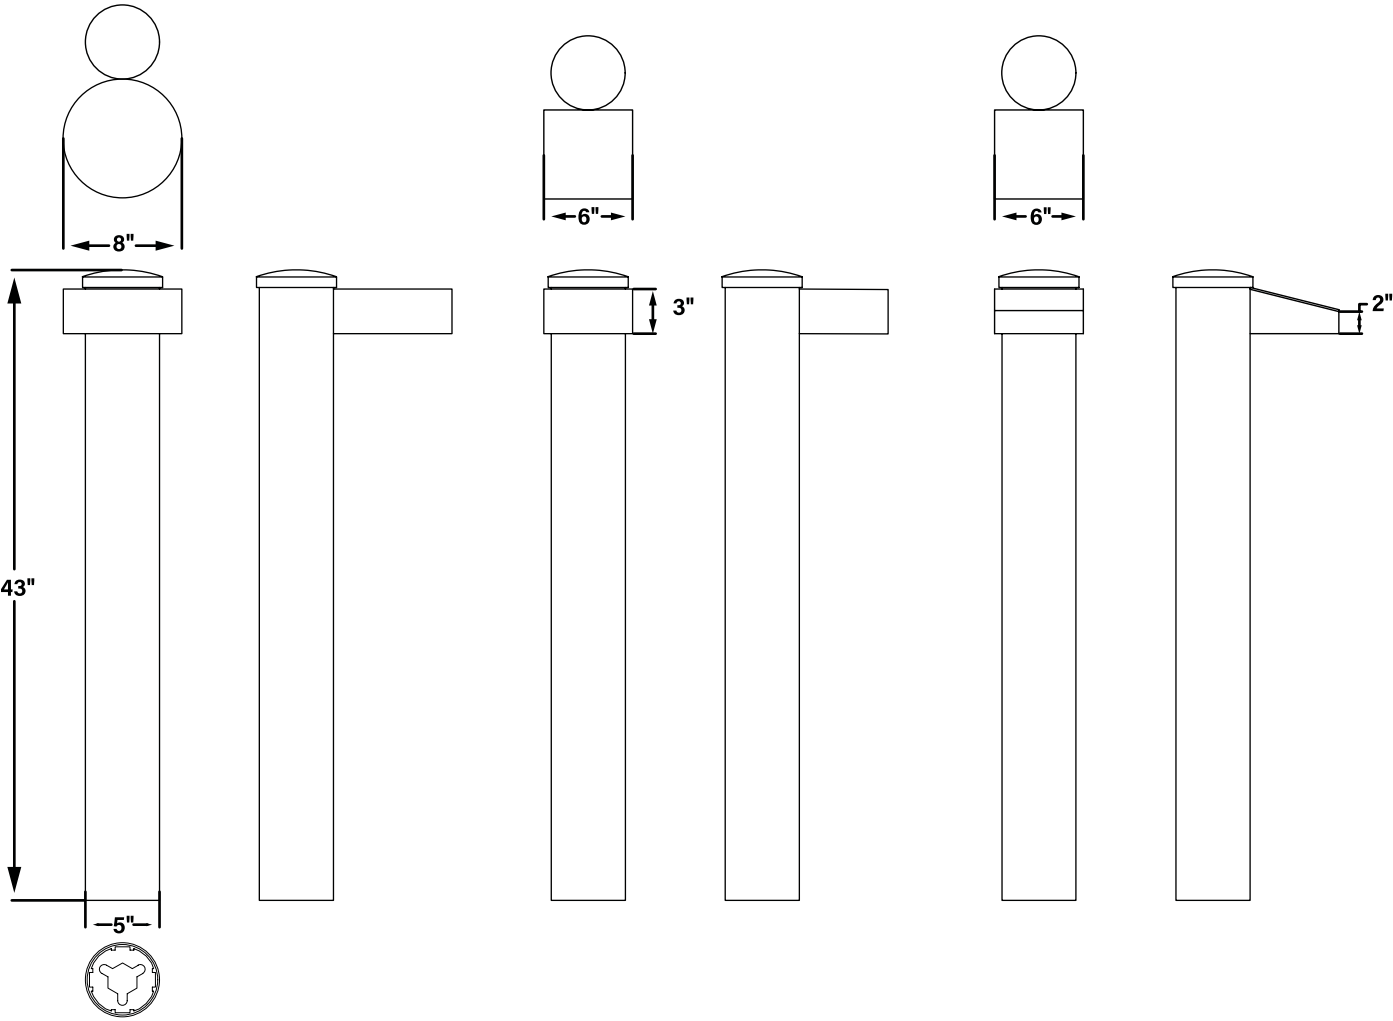




Lumen Output Table

Wattage		10W	15W	20W	30W
Diameter		6"	6"	6"	6"
Input Watts		10.2	14.6	20.4	30.6
Optics	CCT	Delivered Lumens			
2= Type II Clear PC Lens	3000K	1099	1634	2179	3268
	4000K	1112	1668	2224	3360
	5000K	1129	1634	2258	3387
	BUG Rating	B0-U0-G0	B1-U0-G0	B1-U0-G1	B1-U0-G1
3= Type III Clear PC Lens	3000K	1142	1713	2284	3427
	4000K	1165	1749	2332	3497
	5000K	1183	1776	2367	3550
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
4= Type IV Clear PC Lens	3000K	1140	1711	2281	3422
	4000K	1164	1747	2329	3492
	5000K	1182	1773	2364	3546
	BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G2
5= Type V Clear PC Lens	3000K	1210	1815	2420	3632
	4000K	1235	1854	2471	3706
	5000K	1254	1882	2508	3762
	BUG Rating	B1-U0-G0	B1-U0-G1	B2-U0-G1	B2-U0-G1

Anchor Base Details

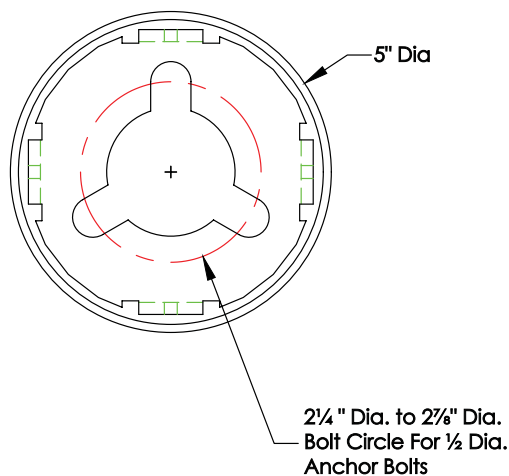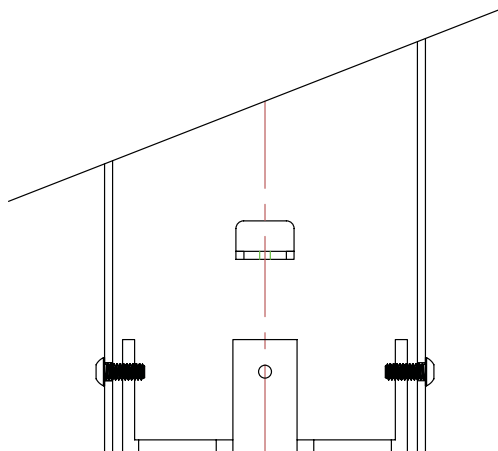



Number of Heads

1 Head	2 Heads	3 Heads
		



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Ordering Guide

Brand		Fixture Type		Shape		Number of Heads		Wattage Per Head		CCT		Voltage		Distribution		Finish		Accessories	
LL	LITELUME	BLROY	Bollard Royal	R	Round	SG	Single 1X	10	10W	50	5000K	UNV	120-277V	T2	Type 2	BZ	Bronze	Blank	None
				S	Square	DB	Double 2 @ 180°	15	15W	40	4000K	480	480V	T3	Type 3	BK	Black	PC	Button Photocell
				A	Angle	TR	Triple 3 @ 120°	20	20W	30	3000K			T4	Type 4	WH	White	HSS	House Side Shield
								30	30W					T5	Type 5	GY	Gray	USB	Dual USB Port*
																GR	Green	GFIC	GFI In-Use Cover, Cast Aluminum*
																SM	Silver Metallic	GFIP	GFI In-Use Cover, Plastic*
																CUS	Custom Color		
																T	Textured		

* Indicate Location