



Description

The LITELUME™ LED Pavlopetri Sconce (LL-PAVSC) luminaire incorporates a traditional fresh design. Features a die-formed cold rolled steel housing with frosted lens for a subtle approach. Offering light models in Field Selectable CCT with high power factor and low THD. Applications: commercial, residential, hospitality, entertainment and Hallways lighting.

Fixture Information

Size:	15W
Housing:	Die-formed cold rolled steel
Finish:	Protective powder coat
Color:	Standard: Black (BK) Optional: White (WH) Oil Rubbed Bronze (ORB) Gray (GY) Custom (CUS)
Mounting:	Standard: Wall Mount
Lens:	High transmission acrylic
CRI:	80
THD:	<10%
Power Factor:	.98
Voltage:	Standard: 120-277V
Dimming:	Standard: No
Sensor	Standard: None
Warranty:	10 Year Warranty

Performance Data

Lumen Output:

1,200 lm

Lumens Per Watt (typical):

80 lm/W

CCT:

2700K
3000K
3500K
4000K
5000K

Lifespan:

60,000 hrs

Ratings & Certificates


ETL/cETL Listed
Wet Location Listed





Dimensions

Item	Width	Height	Depth
LL-PAVSC	12.2"	5.0"	3.5"

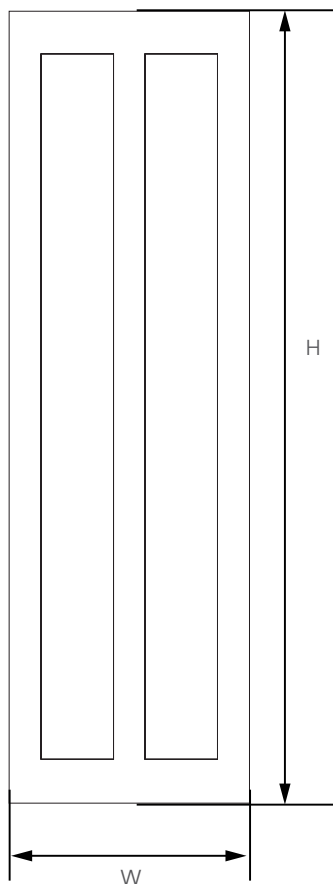



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Ordering Guide

Brand		Fixture Type		Lumen Package		Voltage		CCT		Finish	
LL	LITELUME	PAVSC	Pavlopetri Sconce	1L	890 Lumens	UNV	120-277V	SCT	Selectable color temperature *	BK	Black
										ORB	Oil Rubbed Bronze
										WH	White
										GY	Gray
										CUS	Custom

* SCT Selectable color temperature 2700K/3000K/3500K/4000K/5000K

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Finish
LL-PAVSC-1L-UNV-SCT-BK	15	1200	2700K 3000K 3500K 4000K 5000K	120-277	Black
LL-PAVSC-1L-UNV-SCT-ORB	15	1200	2700K 3000K 3500K 4000K 5000K	120-277	Oil Rubbed Bronze
LL-PAVSC-1L-UNV-SCT-WH	15	1200	2700K 3000K 3500K 4000K 5000K	120-277	White
LL-PAVSC-1L-UNV-SCT-GY	15	1200	2700K 3000K 3500K 4000K 5000K	120-277	Gray
LL-PAVSC-1L-UNV-SCT-CUS	15	1200	2700K 3000K 3500K 4000K 5000K	120-277	Custom