



Wall Pack Half Round



Description

The Wall Pack Half Round (LL-WPHR) provides multiple wattages of down light. Featuring high performance LEDs and a long lasting driver, this fixture provides effective lighting all around. It can be used around retail malls, restaurants, dealerships, shopping centers, and hospitality.

Fixture Information

Size:	15W/30W/50W/72W
Housing:	Die cast aluminum body
Lens:	Glass
Finish:	UV Stabilized Powder coated finish
Color:	Standard: Bronze Custom options available
CRI:	80
THD:	<20%
Power Factor:	.90
Dimming:	Standard: 0-10V
Voltage:	Standard: 120-277V
Warranty:	10 Year Warranty

Performance Data

Lumen Output:

1800 to 8640 lm

Lumens Per Watt (typical):

120 lm/W

CCT:

3000K

4000K

5000K

Distribution:

Wide Throw

Forward Throw

Ratings & Certificates


UL & cUL Listed
Title 24 Compliant





Dimensions

Item	Width	Height	Length
15W/30W/50W/72W	9.25"	7.1"	18.1"

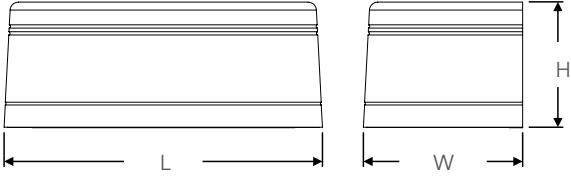


Photometrics

72W Forward Throw

Lum. Classification System (LCS)


LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	1435.7	17.7	17.7
FM (30-60)	3152.4	38.9	38.9
FH (60-80)	1074.1	13.2	13.2
FVH (80-90)	75.5	0.9	0.9
BL (0-30)	1025.2	12.6	12.6
BM (30-60)	1117.1	13.8	13.8
BH (60-80)	187.0	2.3	2.3
BVH (80-90)	11.4	0.1	0.1
UL (90-100)	4.4	0.1	0.1
UH (100-180)	24.0	0.3	0.3
Total	8106.8	99.9	100.0
BUG Rating	B3-U2-G1		




72W Wide Throw

Lum. Classification System (LCS)


LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	1530.1	17.7	17.7
FM (30-60)	3359.8	38.9	38.9
FH (60-80)	1144.7	13.2	13.2
FVH (80-90)	80.5	0.9	0.9
BL (0-30)	1092.6	12.6	12.6
BM (30-60)	1190.6	13.8	13.8
BH (60-80)	199.3	2.3	2.3
BVH (80-90)	12.1	0.1	0.1
UL (90-100)	4.7	0.1	0.1
UH (100-180)	25.6	0.3	0.3
Total	8640.0	99.9	100.0
BUG Rating	B3-U2-G1		



LL-WPHR-[15][30][50][72]-50-UNV-WT-BZ



LL-WPHR-[15][30][50][72]-50-UNV-FT-BZ





Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Distribution	Finish
LL-WPHR-[15][30][50][72]-50-UNV-FT-BZ	15/30/50/72	1800/3600/6000/8640	5000K	120-277	Forward Throw	Bronze
LL-WPHR-[15][30][50][72]-40-UNV-FT-BZ	15/30/50/72	1800/3600/6000/8640	4000K	120-277	Forward Throw	Bronze
LL-WPHR-[15][30][50][72]-30-UNV-FT-BZ	15/30/50/72	1800/3600/6000/8640	5000K	120-277	Forward Throw	Bronze
LL-WPHR-[15][30][50][72]-50-UNV-WT-BZ	15/30/50/72	1800/3600/6000/8640	5000K	120-277	Wide Throw	Bronze
LL-WPHR-[15][30][50][72]-40-UNV-WT-BZ	15/30/50/72	1800/3600/6000/8640	4000K	120-277	Wide Throw	Bronze
LL-WPHR-[15][30][50][72]-30-UNV-WT-BZ	15/30/50/72	1800/3600/6000/8640	3000K	120-277	Wide Throw	Bronze

* Please contact LITELUME for all Custom Option Requests

Accessories Ordering Information

Part #	Description
PC	Button Photocell, 120-277V
OC	Occupancy Sensor
EM	Emergency Driver
SS	10KV Surge