




Vaportite Premium



Description

The LITELUME™ LED Vaportite Premium (LL-VTP) is a suspended or surface mounted vapor proof luminaire designed for retrofit or new construction. Applications include parking garage, stairwell lighting, commercial and industrial with applicable building and safety codes. Featuring 4 level lumen output and 3 color adjustable CCT, allowing for customized energy savings and comfortability. High Power factor .95 and low THD.

Fixture Information

Size:	40W/57W/73W/95W
Housing:	Diecast aluminum
Lens:	Impact resistant polycarbonate
Latches:	Standard: Stainless Steel
Color:	Color: Standard: White
Mounting:	Standard: Surface Mount, Optional: Suspended Mount with V Hooks
Accessories:	Emergency Battery Back-up
Sensor:	Standard: No sensor Optional: PIR or Microwave Motion sensor
Dimming:	0-10V
Operating Temperature:	-40° F to 113° F
Power Factor:	.95
CRI:	80
Voltage:	Standard: 120-277V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

5,000 to 13,000 lm

Lumens Per Watt (typical):

120 to 137 lm/W

CCT:

3000K

4000K

5000K

Lifespan:

Up to 100,000 running hours

Ratings & Certificates



UL Listed for Wet Locations
IP 66





Dimension

Item	Width	Length	Height	Weight
LL-VTP	6.8"	23.6"	3.7"	8.197 lbs

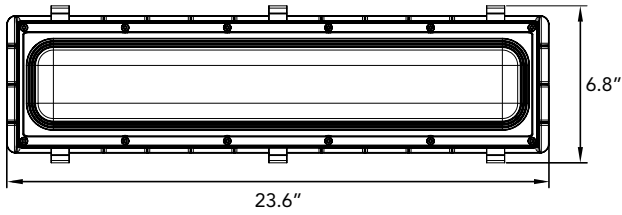

Adjustable Lumen Output Table

LL-VTP-[40][57][73][95]-2CCT-UNV					
Switch Setting	CCT	Parking Garage		Low Bay	
		Setting Watts	Lumens	Setting Watts	Lumens
100%	5000K	95W	11600	95W	13000
80%	5000K	73W	9000	73W	10000
60%	5000K	57W	7000	57W	7800
40%	5000K	40W	5000	40W	5700

LL-VTP-[40][57][73][95]-2CCT-UNV						
Photometry	System Watts	CRI	4000K		5000K	
			Lumens	LPW	Lumens	LPW
Parking Garage	95W	80	11400 lms	120 lm/W	11600 lms	122 lm/W
Low Bay	95W	80	12700 lms	134 lm/W	13000 lms	137 lm/W

Features

CCT AND WATTAGE SELECTABLE
This fixture has the function of adjusting the lumens output and color temperature on-site.

WATTAGE SELECT

40% 60% 80% 100%

Each model supports 4 positions wattage regulation : 100%, 80%, 60%, 40%

CCT SELECT

4000K 5000K


Offer three CCT adjustable (4000K, 5000K).



Mounting



Surface Mount
(Standard with included brackets)

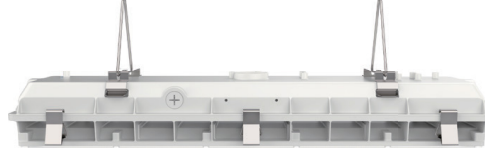

V-Hook (optional)



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	CCT	Voltage
LL-VTP-[40][57][73][95]-3CCT-UNV-PG	40W/57W/73W/95W	5000/7000/9000/11600	3000K 4000K 5000K	120-277
LL-VTP-[40][57][73][95]-3CCT-UNV-LB	40W/57W/73W/95W	5700/7800/10000/13000	3000K 4000K 5000K	120-277

Accessories Ordering Information

Part #	Description
BRI819P-B-D	Sharkward 120-277V 0-10V Microwave Motion Sensor
BRI823-X-D-WH	Sharkward 0-10V PIR Sensor, White **IP 66 RATED**
RC100	Remote Control 100
BRI819P-B-D-BLE-GE	Homewell GEBC 120-277V 0-10V Bluetooth PIR Sensor
BRI-WS204-GE	Homewell GEBC 4-Button Wireless Wall Switch, 120VAC
VTP-VH	V Hooks For VTP
EM8	Emergency Battery Back Up, 8W, 90 minutes

Buy American Act Compliant Ordering Information

Part #	Description
BAA-VTP	Buy American Act Compliant For Vaportite Premium

* Please contact LITELUME for all Custom Option Requests