



Post Top Luminaire



*Not all product variations listed on this page are DLC qualified. Visit www.designlights.org/ search to confirm qualification



Description

The LITELUME™ Area Light Post Top Luminaire (LL-PTL) combines beauty and performance with it's fresh urban style. Featuring a die-cast aluminum housing with outstanding corrosion protection. Compact in design low profile dark sky rated with soft light. Suitable for mounting heights of 8-20' makes this aesthetically pleasing an excellent choice for pathway, walkway, municipality and general lighting applications.

Fixture Information

Size:	45W/70W/87W/130W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Gray (GY)
Mounting:	Tenon fits 2 3/8" standard OD
Lens:	Polycarbonate
Power Factor:	.90
CRI:	80
Dimming:	Standard
Operating Temperature:	-40°F to 113°F
Surge Protector:	Standard: 10kVA
Voltage:	Standard: 120-277V Custom 347-480v (130W ONLY)
EPA:	.97
Sensor:	Standard: No sensor Custom Options: Bi-level motion sensor w/ Remote control Twist Lock Photocell and Receptacle (120-277V) and Photocell (120-277V)
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

5,400 to 15,800 lm

Lumens Per Watt (typical):

120-122 lm/W

CCT:

3000K
4000K
5000K

Distribution:

Type V

Lifespan:

Up to 100,000 running hours

Ratings & Certificates

UL Wet Location
IP66 Listed
Title 24 Compliant
TAA Compliant/BAA Optional




Quick Ship Ordering Information

Part #
LL-PTL-[45][70][87][130]-3CCT-UNV-T5-BZ



Dimensions

Item	Width	Length
Post Top Luminaire	25.2"	25.1"

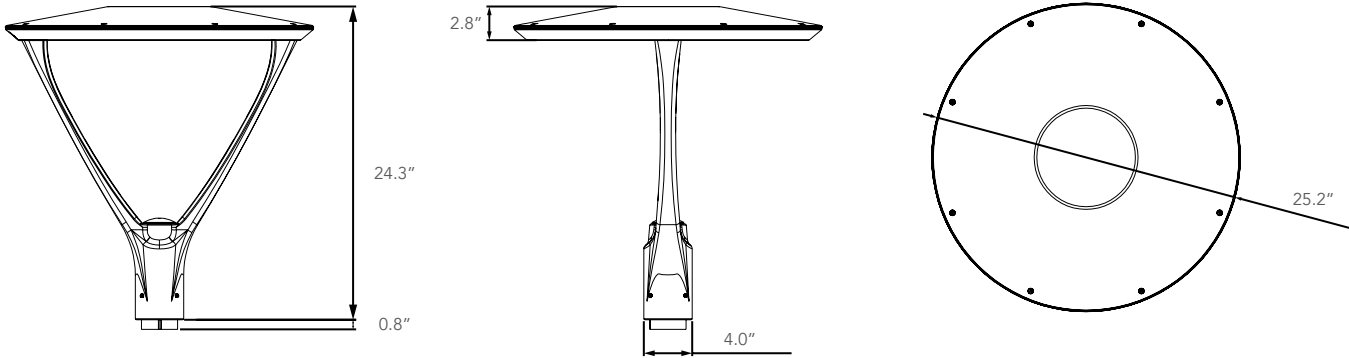



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Type Distribution
LL-PTL-45-50-UNV-T5-BZ	45	5450	5000	120-277	Type V
LL-PTL-45-40-UNV-T5-BZ	45	5450	4000	120-277	Type V
LL-PTL-45-30-UNV-T5-BZ	45	5400	3000	120-277	Type V
LL-PTL-70-50-UNV-T5-BZ	70	8500	5000	120-277	Type V
LL-PTL-70-40-UNV-T5-BZ	70	8500	4000	120-277	Type V
LL-PTL-70-30-UNV-T5-BZ	70	8400	3000	120-277	Type V
LL-PTL-87-50-UNV-T5-BZ	87	10600	5000	120-277	Type V
LL-PTL-87-40-UNV-T5-BZ	87	10600	4000	120-277	Type V
LL-PTL-87-30-UNV-T5-BZ	87	10400	3000	120-277	Type V
LL-PTL-130-50-UNV-T5-BZ	130	15800	5000	120-277	Type V
LL-PTL-130-40-UNV-T5-BZ	130	15800	4000	120-277	Type V
LL-PTL-130-30-UNV-T5-BZ	130	15600	3000	120-277	Type V
LL-PTL-[45][70][87][130]-3CCT-UNV-T5-BZ	45W/70W/87W/130W	5450/8500/10600/1580	3000K 4000K 5000K	120-277	Type V

* Please contact LITELUME for all Custom Option Requests

Accessories Ordering Information

Part #	Wattage
SUB "UNV" WITH "480"	480 Volt **130W ONLY**
TLPC	Twist Lock Photocell & Receptacle 120-277V
BRI823-B-D	Sharkward 120-277V 0-10V PIR Sensor
RC-100	Remote Control 100

* Please contact LITELUME for all Custom Option Requests

Buy American Act Compliant Ordering Information

Part #	Description
BAA-PTL	Buy American Act Compliant for Post Top Luminaire

* Please contact LITELUME for all Custom Option Requests