



Vaportite Premium



Description

The LITELUME™ LED Vaportite Premium (LL-VTP) is a suspended or surface mounted vapor proof luminaire designed for retrofit or new construction. Applications include parking garage, stairwell lighting, commercial and industrial with applicable building and safety codes. Featuring 4 level lumen output and 3 color adjustable CCT, allowing for customized energy savings and comfortability. High Power factor .95 and low THD.

Fixture Information

| | |
|------------------------|--|
| Size: | 40W/57W/73W/95W |
| Housing: | Diecast aluminum |
| Lens: | Impact resistant polycarbonate |
| Color: | Color: Standard: White |
| Mounting: | Standard: Surface Mount, Optional: Suspended Mount with V Hooks |
| Accessories: | Emergency Battery Back-up |
| Sensor: | Standard: No sensor Optional: PIR or Microwave Motion sensor |
| Dimming: | 0-10V |
| Operating Temperature: | -40° F to 113° F |
| Power Factor: | .95 |
| CRI: | 80 |
| Voltage: | Standard: 120-277V |
| Warranty: | 10-Year Limited Warranty |

Performance Data

Lumen Output:

5,000 to 13,000 lm

Lumens Per Watt (typical):

120 to 137 lm/W

CCT:

3000K

4000K

5000K

Lifespan:

Up to 100,000 running hours

Ratings & Certificates



UL Listed for Wet Locations
IP 66





Dimension

| Item | Width | Length | Height | Weight |
|--------|-------|--------|--------|-----------|
| LL-VTP | 6.8" | 23.6" | 3.7" | 8.197 lbs |

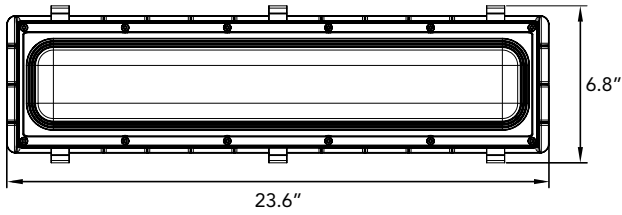

Adjustable Lumen Output Table

| LL-VTP-[40][57][73][95]-2CCT-UNV | | | | | |
|----------------------------------|-------|----------------|--------|---------------|--------|
| Switch Setting | CCT | Parking Garage | | Low Bay | |
| | | Setting Watts | Lumens | Setting Watts | Lumens |
| 100% | 5000K | 95W | 11600 | 95W | 13000 |
| 80% | 5000K | 73W | 9000 | 73W | 10000 |
| 60% | 5000K | 57W | 7000 | 57W | 7800 |
| 40% | 5000K | 40W | 5000 | 40W | 5700 |

| LL-VTP-[40][57][73][95]-2CCT-UNV | | | | | | |
|----------------------------------|--------------|-----|-----------|----------|-----------|----------|
| Photometry | System Watts | CRI | 4000K | | 5000K | |
| | | | Lumens | LPW | Lumens | LPW |
| Parking Garage | 95W | 80 | 11400 lms | 120 lm/W | 11600 lms | 122 lm/W |
| Low Bay | 95W | 80 | 12700 lms | 134 lm/W | 13000 lms | 137 lm/W |

Features

CCT AND WATTAGE SELECTABLE
This fixture has the function of adjusting the lumens output and color temperature on-site.

WATTAGE SELECT

40% 60% 80% 100%

Each model supports 4 positions wattage regulation : 100%, 80%, 60%, 40%

CCT SELECT

4000K 5000K

Offer three CCT adjustable (4000K, 5000K).



Mounting



Surface Mount
(Standard with included brackets)

V-Hook (optional)



| | |
|---------------------|--|
| Project Name | |
| Catalog # | |
| Job Type | |
| Prepared By | |
| Notes | |

Fixture Ordering Information

| Part # | Wattage | Lumens | CCT | Voltage |
|-------------------------------------|-----------------|-----------------------|-------------------|---------|
| LL-VTP-[40][57][73][95]-3CCT-UNV-PG | 40W/57W/73W/95W | 5000/7000/9000/11600 | 3000K 4000K 5000K | 120-277 |
| LL-VTP-[40][57][73][95]-3CCT-UNV-LB | 40W/57W/73W/95W | 5700/7800/10000/13000 | 3000K 4000K 5000K | 120-277 |

Accessories Ordering Information

| Part # | Description |
|--------------------|--|
| BRI819P-B-D | Sharkward 120-277V 0-10V Microwave Motion Sensor |
| BRI823-X-D-WH | Sharkward 0-10V PIR Sensor, White **IP 66 RATED** |
| RC100 | Remote Control 100 |
| BRI819P-B-D-BLE-GE | Homewell GEBC 120-277V 0-10V Bluetooth PIR Sensor |
| BRI-WS204-GE | Homewell GEBC 4-Button Wireless Wall Switch, 120VAC |
| VTP-VH | V Hooks For VTP |
| EM8 | Emergency Battery Back Up, 8W, 90 minutes |

Buy American Act Compliant Ordering Information

| Part # | Description |
|---------|--|
| BAA-VTP | Buy American Act Compliant For Vaportite Premium |

* Please contact LITELUME for all Custom Option Requests