



Style 5 Straight Round Aluminum Pole

Made in USA - Virginia

LL-VA-S05-SR

Style 5 - Clamshell

The pole shaft will be constructed of seamless extruded tube of 6063 Aluminum Alloy per the requirements of ASTM B221. The 4-Bolt Cast Aluminum Base Flange will be of Alloy 356-T6. The pole shaft shall be joined to the base by means of a complete circumferential weld in accordance with AWS Specification D1.2. The shaft assembly shall be full-length heat treated after base weld to produce a T6 temper.



CLAMSHELL BASE

Cast Aluminum, 2-Piece Decorative Base of Alloy 356 per ASTM B26 or B108 with stainless steel attaching hardware.

HANDHOLE


4"-5" Butt Diameters - 2" x 4" Handhole with curved Lap Style Aluminum Door and two (2) SS Self-Tapping Attaching Screws. A Grounding Provision incorporating a tapped 1/4"-20NC hole is provided.

VIBRATION DAMPER

When determined necessary by LITELUME, a Vibration Damper will be factory-installed inside the pole shaft. Customer specification of the damper is available.

ANCHORAGE

Anchorage Kit will include four (4) L-shaped Steel Anchor Bolts conforming to AASHTO M314-90 Grade 55. Ten inches (10") of threaded end will be galvanized per ASTM A153. Kits will contain four (4) Hex Nuts, four (4) Lock Washers, and four (4) Flat Washers (all components Galvanized Steel). A bolt circle template will be provided.

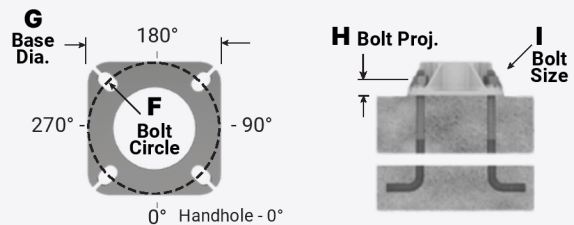


NOTE: All Style 5 pole options may be specified in designs utilizing Direct Buried anchorage.

WARNING: Do not install light pole without luminaire.



Style 5 Straight Round Aluminum Pole

Made in USA - Virginia

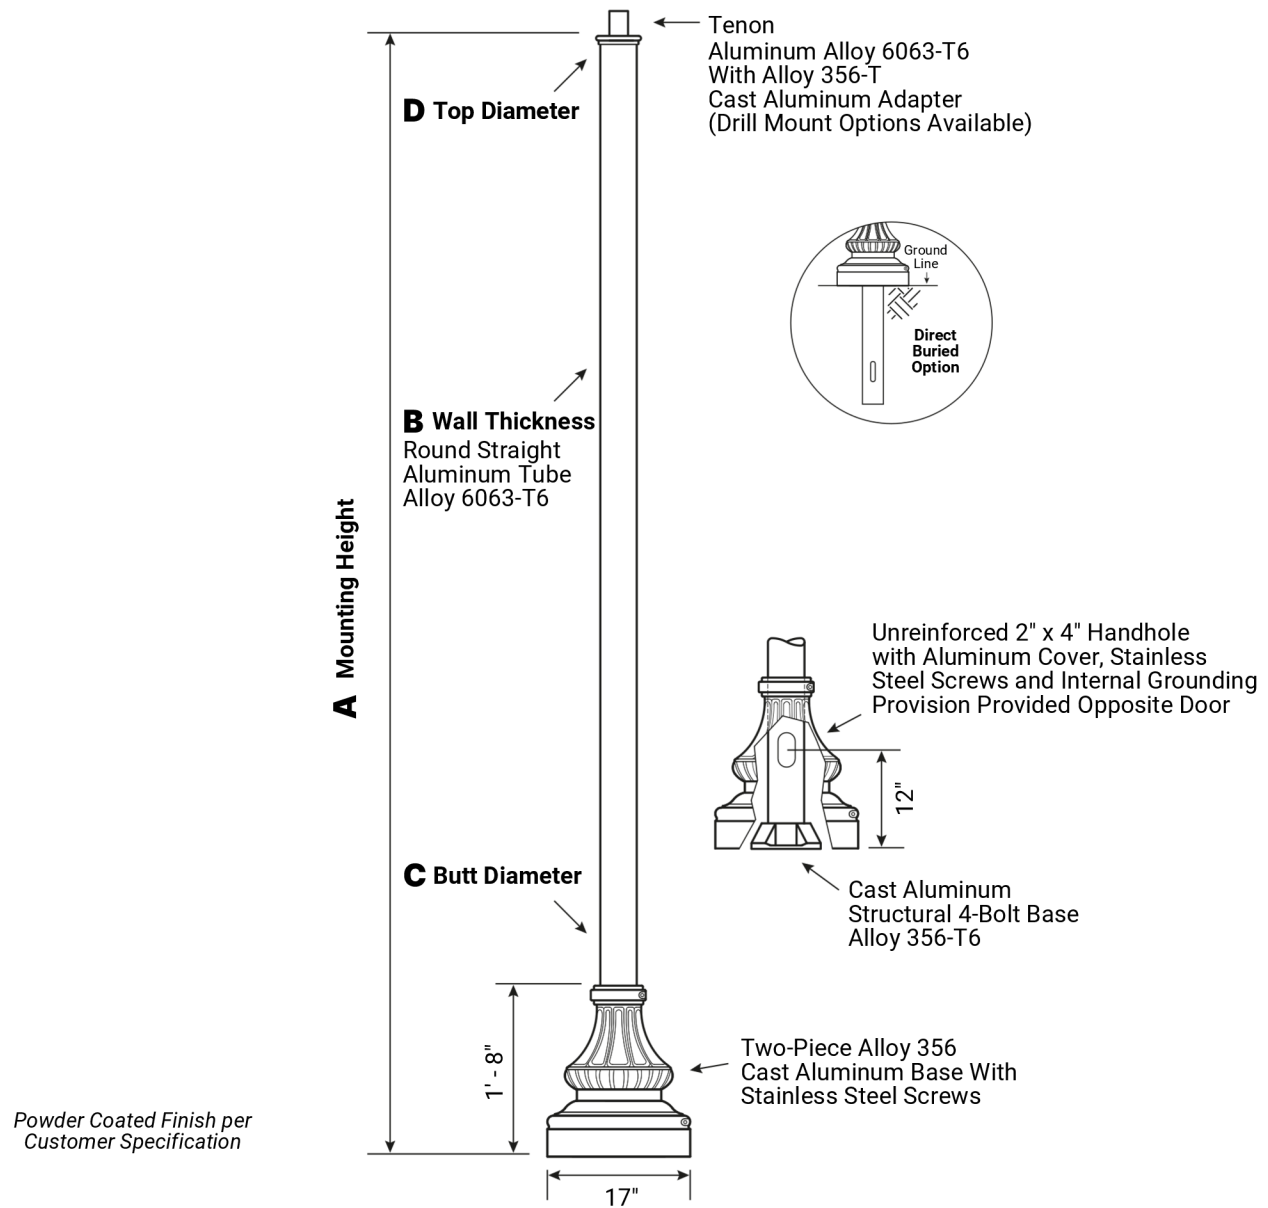

C	D	F	G	H	I
Butt Dia.	Top Dia.	Bolt Cir. Dia.	Base Dia.	Bolt Proj.	Bolt Size
4	4	6.5 - 8	7.5	2	.75 x 17 x 3
5	5	7.5 - 8	7.5	2	.75 x 17 x 3

Dimensions in Inches



Style 5 Straight Round Aluminum Pole

Made in USA - Virginia

CATALOG NUMBER SYSTEM

The catalog number for LITELUME poles utilizes the following identification system.

LL-VA - [S05] [] [] [] - [] - [] [] [] []
Base Style Wall Thick. Anchorage Mounting Options

Catalog Number Example

LL-VA-S05-18-B-4-4-SR-BK

Style 5 Clamshell Base, 18' Mounting Height,
.125" Wall Thickness, 4" Butt Diameter, 4-Bolt Base,
Straight Round Shaft, Black Powder Coat Finish

A	B	C	TOTAL LUM. WEIGHT	MAXIMUM EPA						CATALOG NUMBER
MTG. HGT.	Wall Thickness	Butt Dia.		90	100	110	120	130	140	
8	0.125	4	100	15.5	12.2	9.9	8.1	6.7	5.6	LL-VA-S05-08-B-4-4-SR-**
	0.125	5	100	25.6	20.5	16.5	13.6	11.4	9.8	LL-VA-S05-08-B-5-4-SR-**
10	0.125	4	100	11.4	8.9	7.0	5.6	4.6	3.7	LL-VA-S05-10-B-4-4-SR-**
	0.188	4	100	17.6	13.9	11.1	9.1	7.4	6.2	LL-VA-S05-10-D-4-4-SR-**
	0.125	5	100	19.3	15.4	12.1	9.9	8.3	7.1	LL-VA-S05-10-B-5-4-SR-**
	0.188	5	100	29.3	23.5	18.9	15.6	13.1	11.2	LL-VA-S05-10-D-5-4-SR-**
12	0.125	4	95	8.6	6.5	5.0	3.9	3.0	2.3	LL-VA-S05-12-B-4-4-SR-**
	0.188	4	100	13.6	10.6	8.4	6.7	5.4	4.4	LL-VA-S05-12-D-4-4-SR-**
	0.125	5	100	15.0	11.8	9.1	7.3	6.1	5.1	LL-VA-S05-12-B-5-4-SR-**
	0.188	5	100	23.3	18.6	14.7	12.0	10.1	8.6	LL-VA-S05-12-D-5-4-SR-**
14	0.125	4	70	6.6	4.9	3.6	2.6	1.9	1.3	LL-VA-S05-14-B-4-4-SR-**
	0.188	4	100	10.6	8.1	6.3	4.9	3.8	2.9	LL-VA-S05-14-D-4-4-SR-**
	0.125	5	100	11.7	9.1	6.8	5.3	4.4	3.6	LL-VA-S05-14-B-5-4-SR-**
	0.188	5	100	18.8	14.9	11.6	9.3	7.8	6.6	LL-VA-S05-14-D-5-4-SR-**
16	0.125	4	60	5.0	3.5	2.4	1.5	1.0	-	LL-VA-S05-16-B-4-4-SR-**
	0.188	4	80	8.4	6.3	4.7	3.5	2.5	1.8	LL-VA-S05-16-D-4-4-SR-**
	0.125	5	100	9.1	7.0	4.9	3.6	2.9	2.4	LL-VA-S05-16-B-5-4-SR-**
	0.188	5	100	15.3	12.0	9.0	7.1	5.9	4.9	LL-VA-S05-16-D-5-4-SR-**

Continued on Next Page

*4-Bolt Base Anchorage shown. For direct buried design replace -4 in catalog number with -E.



Style 5 Straight Round Aluminum Pole

Made in USA - Virginia

A	B	C	TOTAL LUM. WEIGHT	MAXIMUM EPA						CATALOG NUMBER
MTG. HGT.	Wall Thickness	Butt Dia.		90	100	110	120	130	140	
18	0.125	4	80	3.1	2.0	1.1	-	-	-	LL-VA-S05-18-B-4-4-SR-**
	0.188	4	65	6.5	4.6	3.3	2.2	1.5	0.9	LL-VA-S05-18-D-4-4-SR-**
	0.125	5	70	7.1	5.3	3.4	2.3	1.8	1.5	LL-VA-S05-18-B-5-4-SR-**
	0.188	5	100	12	9.3	6.7	5.1	4.2	3.4	LL-VA-S05-18-D-5-4-SR-**
20	0.125	4	40	2.3	1.2	-	-	-	-	LL-VA-S05-20-B-4-4-SR-**
	0.188	4	70	4.6	3.1	1.9	1.1	-	-	LL-VA-S05-20-D-4-4-SR-**
	0.25	4	65	7.2	5.1	3.6	2.5	1.6	1.0	LL-VA-S05-20-F-4-4-SR-**
	0.125	5	55	5.3	3.8	2.1	1.3	0.9	0.6	LL-VA-S05-20-B-5-4-SR-**
	0.188	5	90	9.5	7.2	4.9	3.6	2.8	2.2	LL-VA-S05-20-D-5-4-SR-**
	0.25	5	100	13.6	10.5	7.6	5.8	4.8	3.9	LL-VA-S05-20-F-5-4-SR-**
25	0.188	4	55	1.4	-	-	-	-	-	LL-VA-S05-25-D-4-4-SR-**
	0.25	4	90	2.6	1.3	-	-	-	-	LL-VA-S05-25-F-4-4-SR-**
	0.125	5	80	1.2	-	-	-	-	-	LL-VA-S05-25-B-5-4-SR-**
	0.188	5	50	5.0	3.5	1.6	0.7	-	-	LL-VA-S05-25-D-5-4-SR-**
	0.25	5	65	7.9	5.8	3.5	2.2	1.6	1.3	LL-VA-S05-25-F-5-4-SR-**
30	0.188	5	80	0.9	-	-	-	-	-	LL-VA-S05-30-D-5-4-SR-**
	0.25	5	60	3.5	2.1	-	-	-	-	LL-VA-S05-30-F-5-4-SR-**

EPA Notes:

Effective Projected Area (EPA) in square feet. EPA's calculated using wind velocity (mph) indicated in accordance with 2015 AASHTO LRFD (7th Edition) using a 50-year design life. Maximum EPA is based on the luminaire weight shown. Increased luminaire weight may reduce maximum EPA. If weight is exceeded, or if other design life or code is required, please consult the factory.

*4-Bolt Base Anchorage shown.
For direct buried design replace
-4 in catalog number with -E.



Style 5 Straight Round Aluminum Pole

Made in USA - Virginia

MOUNTING OPTIONS

Side Drill Mount

Includes removable pole cap.
NOTE: A luminaire drilling template must be supplied at time of order.




Tenon Mount


For Tenon Mount applications specify both Tenon diameter and length.



Drill Mount Options



Pole Orientation



PROJECT NAME

CATALOG #

JOB TYPE

PREPARED BY

NOTES

ORDERING GUIDE

Brand		Location		Base Style		Height	
LL LITELUME		VA Virginia		S05 Style 5		8 = 8' 10 = 10' 12 = 12' 14 = 14' 16 = 16' 18 = 18' 20 = 20' 25 = 25' 30 = 30'	
Wall Thick.	Butt Dia.	Anchorage		Shaft Style	Mounting Options	Finish	
B = .125" D = .188" F = .250"	4 = 4" 5 = 5"	4 = 4-Bolt Base E = Direct Buried		SR = Straight Round	TENON T204 - 2-3/8" O.D. X 4" T304 - 2-7/8" O.D. X 4" T356 - 3-1/2" O.D. X 6" T406 - 4" O.D. X 6" TCUS - Custom Tenon** **Specify O.D. and Height	POWDER COAT COLORS BK - Black Powder Coat WH - White Powder Coat DBZ - Dark Bronze Powder Coat DGR - Dark Green Powder Coat GY - Gray Powder Coat CUS - Custom Color* * Provide RAL # or Sample Color Chip	