



Amberlume Series Wall Pack Small Full Cutoff



Description

The Litelume Amberlume Series Wall Pack Small Full Cutoff (LL-ALWPSFC) luminaire is available in an IES Type V distribution and designed to replace HID lighting systems up to 175w MH or HPS for wildlife or security applications requiring monochromatic AMBER light. LEDs operate between 585 and 595 nm, greater than 560nm required for wildlife protection. Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, office buildings and medical facilities. Mounting heights of 12 to 18 feet can be used based on light level and uniformity requirements.

Fixture Information

Size:	22W
Housing:	Die Cast Hinged and Gasketed Aluminum Front Frame and Housing with ½" Coin Plugs
Finish:	Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating
Lens:	Tempered Clear Flat Glass Lens
Temperature:	-40°C to +40°C
Voltage:	Standard: 120-277V
Power Factor:	>.90
Surge Protector:	2 kVA
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

794 lm

Lumens Per Watt (typical):

32 lm/W

CCT:

Amber

Lifespan:

196,000 hrs @ 25°C (L70)

Ratings & Certificates


CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP66 Sealed LED Compartment. ADA Compliant. 10 year Warranty. BAA Compliant







Dimension

Item	Height	Width	Depth
22W	8.625"	8.75"	9.50"

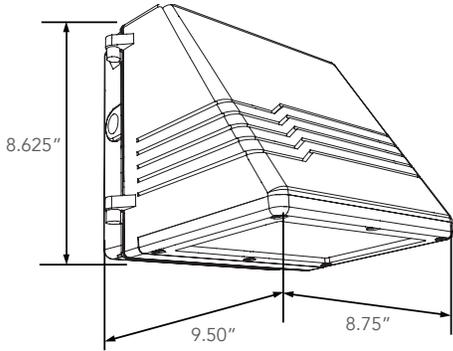

Photometric

LL-ALWPSFC-22-AMB-UNV-BZ

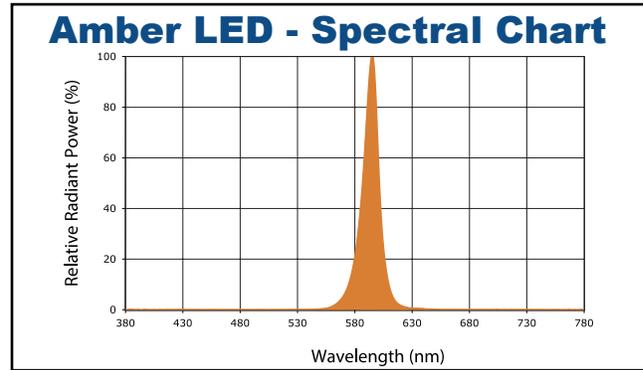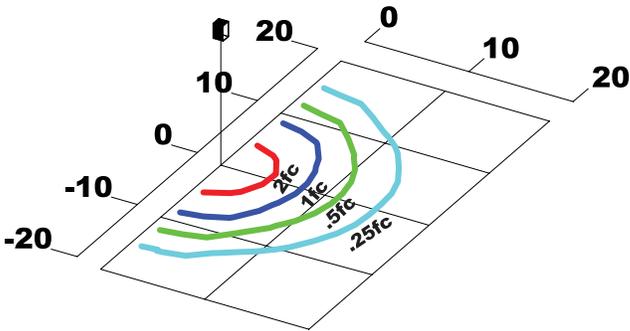



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	CCT	Voltage	Color
LL-ALWPSFC-22-AMB-UNV-BZ	22	794	Amber	120-277V	Bronze

Accessories Ordering Information

Part #	Description
SF	Single Fuse *120-277V Only*
DF	Double Fuse *120-277V Only*
SP	Surge Protection
P10	Pencil Photocell, 120V
P12	Pencil Photocell, 208-277V
P14	Pencil Photocell, 120-277V
P20	Swivel Photocell, 120V
P22	Swivel Photocell, 208-277V
BU	Battery Backup, 90 Minutes *120-277V Only*
SUB "UNV" WITH "480"	480 Volt

* Please contact LITELUME for all Custom Option Requests