



Door Pack Premium



Description

The LITELUME™ LED Door Pack Premium (LL-DPP) features a heavy-duty diecast construction and polycarbonate optical lens with UV stabilizers. Available in 2 low wattages and selectable CCT. Compact in design and symmetry making this luminaire ideal for office buildings, apartments, townhomes, storage facilities, man doors and a broad spectrum of overall multi-family, service and industrial applications

Fixture Information

Size:	15W/25W
Housing:	Die-cast Housing
Finish:	Protective powder coat
Color:	Standard: Bronze
Mounting:	Standard: Wall Mount
Lens:	Clear Polycarbonate
CRI:	80
Power Factor:	.90
Sensor:	Standard: Photocell
Dimming:	Standard: 0-10V
Voltage:	Standard: 120-277V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

2,246 to 3,556 lm

Lumens Per Watt (typical):

150 lm/W

CCT:

3000K

4000K

5000K

Lifespan:

Up to 100,000 running hours

Ratings & Certificates


UL Listed For Wet Location






Dimension

Item	Wide	Depth	Height	Weight
LL-DPP	4.75"	2.36"	7.98"	1.26 lbs

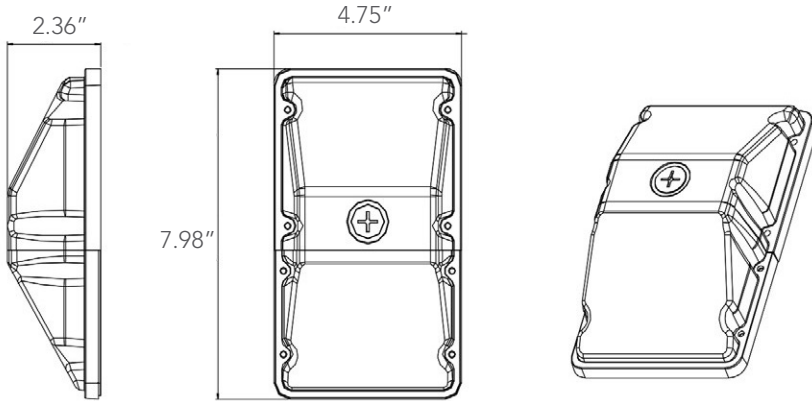


Photometrics

15W-3000K

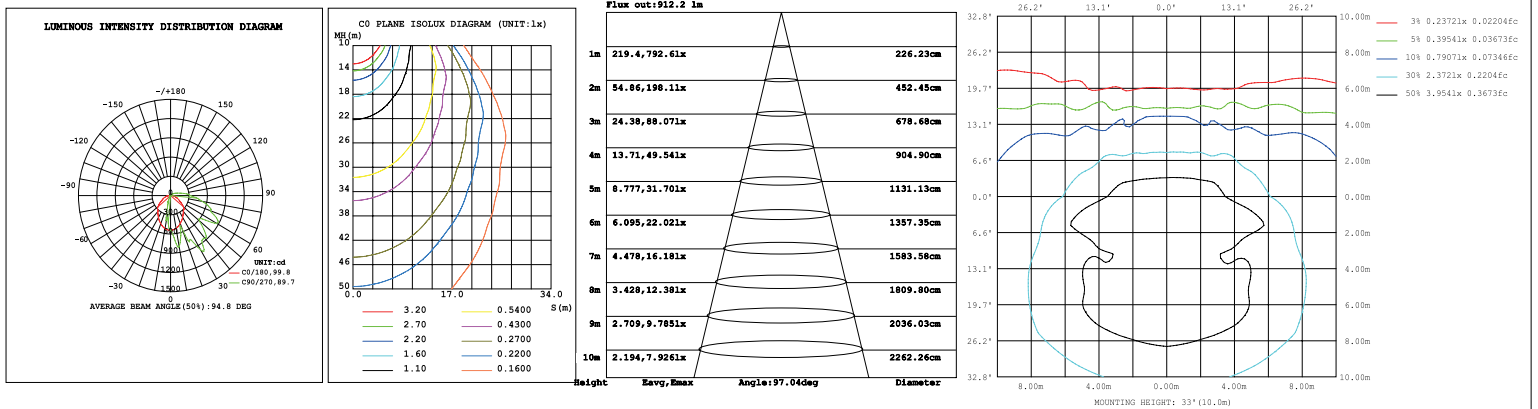

25W-3000K

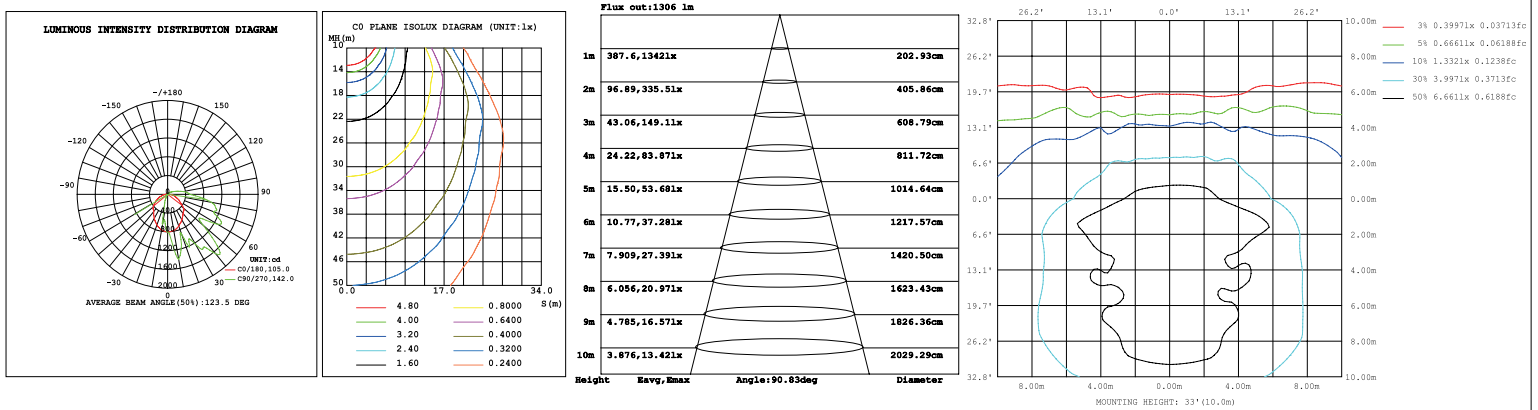



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-DPP-15-3CCT-UNV-BZ-PC	15	2246	3000K 4000K 5000K	120-277
LL-DPP-25-3CCT-UNV-BZ-PC	25	3556	3000K 4000K 5000K	120-277

* Please contact LITELUME for all Custom Option Requests