



LED Round Slim Downlight Disk

LL-RSDLD

LED Round Slim Downlight Disk

The LITELUME™ LED Round Slim Light Disk (LL-RSLD) luminaire can be used in a wide variety of applications in new construction or retrofit. Featuring 3 different form factors and lumen packages to choose from, 5 CCT field selectable, 120v triac dimming, and wet location rated.



PERFORMANCE DATA

Lumen Output	1000 - 2000 lm	Ratings & Certificates <ul style="list-style-type: none">• ETL/cETL Listed• Wet Location• Energy Star• ADA Compliant
Lumens Per Watt (typical)	85 lm/W	
CCT	2700K / 3000K 3500K / 4000K 5000K	
Lifespan	60,000 hrs	

APPLICATIONS

Multi-Family • Schools • Hotels • Offices
Commercial, Hospitality & Residential Use in 120V.


FIXTURE INFORMATION

Size	Housing	Lens	Mounting
7", 9" and 12" E26 adapter included	Polycarbonate	High Light Transmission Diffused Semi-clear Plastic	Surface Mount
Dimming	Power Factor	CRI	Warranty
120V Triac	>.90	90	10 Year Limited



LED Round Slim Downlight Disk

DIMENSIONS		
Model	Wattage	Dimension
LL-RSDLD-7-1L-SCT-120-WH	12W	H: 0.55 In. L: 7.10 In. W: 7.10 In.
LL-RSDLD-9-1L-SCT-120-WH	18W	H: 0.55 In. L: 8.86 In. W: 8.86 In.
LL-RSDLD-12-2L-SCT-120-WH	24W	H: 0.55 In. L: 11.82 In. W: 11.82 In.

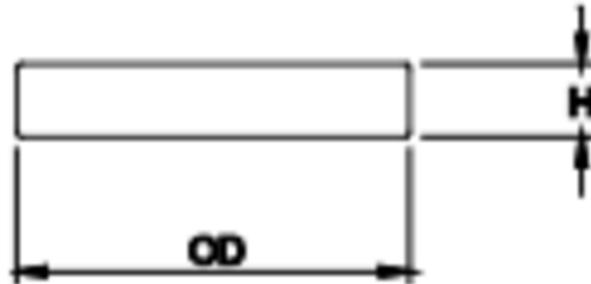



LED Round Slim Downlight Disk

PROJECT NAME	
CATALOG #	
JOB TYPE	
PREPARED BY	
NOTES	

ORDERING GUIDE

Brand	Fixture Type	Size	Lumen Package
LL LITELUME	RSDLD Round Slim Down Light Disk	7 7" Round 9 9" Round 12 12" Round	1L 1000 Lumens * 1L 1500 Lumens ** 2L 2000 Lumens ***
Voltage	CCT		Finish
120 120V	SCT Selectable Color Temperature ****		WH White

* 7" Round ** 9" Round *** 12" Round
**** Selectable CCT 2700K / 3000K / 3500K / 4000K / 5000K

ORDERING INFORMATION

Part #	Watts	Lumens	Kelvin	Voltage
LL-RSDLD-7-1L-SCT-120-WH	12	1000	2700K 3000K 3500K 4000K 5000K	120
LL-RSDLD-9-1L-SCT-120-WH	18	1500	2700K 3000K 3500K 4000K 5000K	120
LL-RSDLD-12-2L-SCT-120-WH	24	2000	2700K 3000K 3500K 4000K 5000K	120