



# Cylinder Wall Sconce Elite



## LL-CYLWSE

### Cylinder Wall Sconce Elite

The LITELUME™ LED Cylinder Wall Sconce Elite (LL-CYLWSE) is a specification grade field adjustable Uplight/Downlight Wall Mounted luminaire designed for retrofit or new construction. A one size fits all 4.6" diameter. Includes a photocell with on/off dip switch. Choose between uplight, downlight or up/down combination. Featuring 3 color adjustable CCT, and 4 different field selectable lumen selections, allowing for customized energy savings and comfortability.



#### PERFORMANCE DATA

Lumen Output	1600 - 3460 lm
Lumens Per Watt (typical)	107 lm/W
CCT	3000K 4000K 5000K
Lifespan	L70 Rated Lifetime of 60,000 Hours

#### RATINGS & CERTIFICATES

UL Listed • Wet Location • IP65 • TAA

#### APPLICATIONS

Retail • Hospitality • Healthcare • Education  
Office • Multi-Family • Tunnels & Walkways  
Entryways • Building Exteriors • Industrial

#### FIXTURE INFORMATION

Size	Housing	Finish	Lens			Color	Beam Angle
15W - 36W	High Grade Die-Cast Aluminum	Powder Coat	Tempered Glass			Black	70°
Voltage	Dimming	Selectable	PF	THD	CRI	Warranty	Operating Temp.
120 - 277V	Standard: 0-10V 10% - 100%	Lumens, CCT, Distribution	.90	<15%	90	10 Year	-22°F to 122°F




## SPECIFICATION (LL-CYLWSE-3L)

Setting	Watts	3000K		4000K		5000K	
		Lumens (90CRI)	LPW (90CRI)	Lumens (90CRI)	LPW (90CRI)	Lumens (90CRI)	LPW (90CRI)
Level 1	36W	3130	87	3460	96	3280	91
Level 2	30W	2640	88	2930	98	2750	92
Level 3	22W	1970	90	2200	100	2080	95
Level 4	15W	1440	96	1600	107	1520	101

## WATTAGE AND CCT SELECTABLE

This fixture has the function of adjusting the lumens output and color temperature on-site.

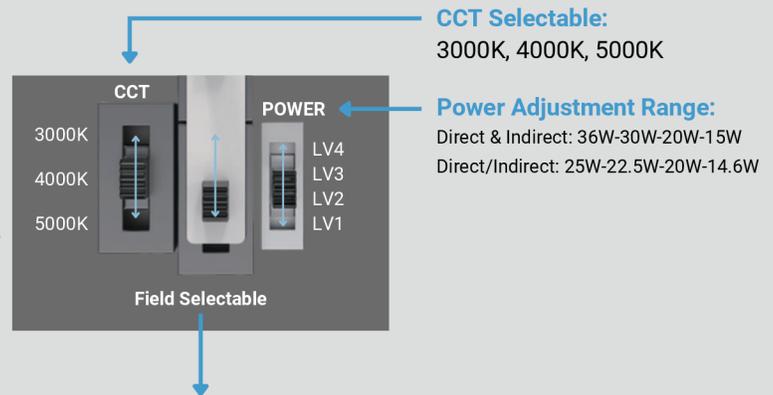


### Photocell Cap


Disable



Enable

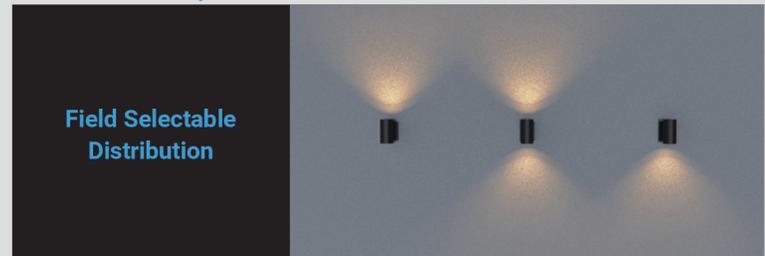

## DIMENSIONS

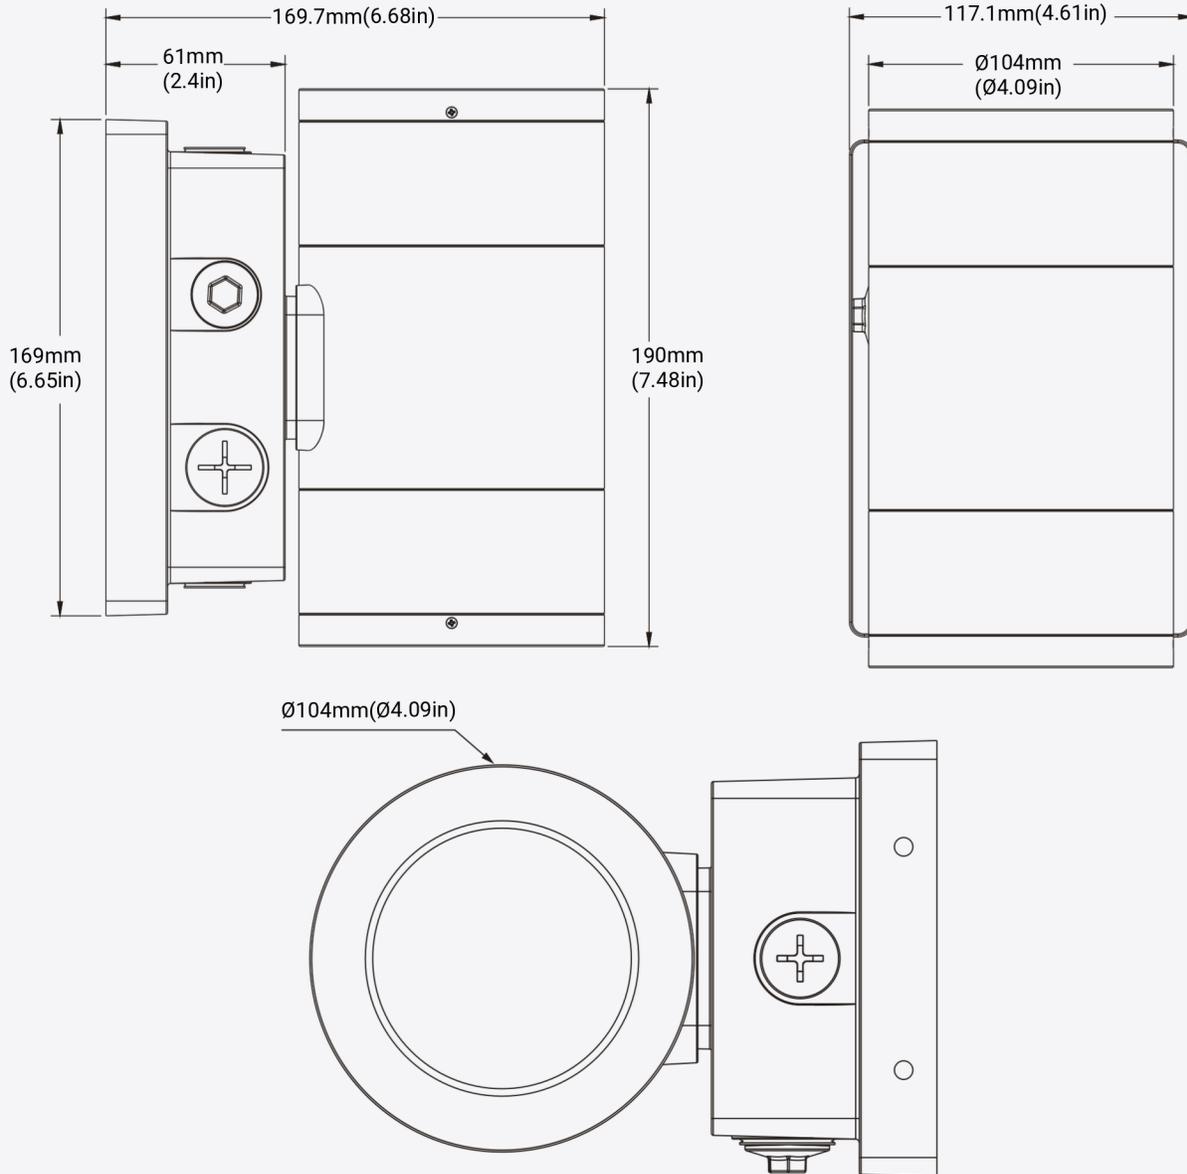



# Cylinder Wall Sconce Elite

PROJECT NAME	
CATALOG #	
JOB TYPE	
PREPARED BY	
NOTES	

## ORDERING GUIDE

Brand	Fixture Type	Lumen Package	Voltage	CCT
LL LITELUME	<b>CYLWSE</b> Cylinder Wall Sconce Elite	<b>3L</b> 3460 Lumens	<b>UNV</b> 120-277V	<b>SCT</b> Selectable Color Temperature
Power	Distribution	Beam	Finish	Photocell
<b>SP</b> Selectable Power	<b>SD</b> Selectable Distribution	<b>70</b> 70 Degree	<b>BK</b> Black	<b>PC</b> Photocell with On/Off Dip Switch

## FIXTURE ORDERING INFORMATION

Part #	Watts	Lumens	Kelvin	Voltage	Beam
LL-CYLWSE-3L-UNV-SCT-SP-SD-70-BK-PC	15W/22W/ 30W/36W	1600/2200/ 2930/3460	3000K/4000K/5000K	120-277V	70