Sconce Modern Series



Description

The LITELUME™ Sconce Modern Series (LL–SMS) luminaire incorporates a traditional fresh design. Features a die-formed cold rolled steel housing in Satin Nickel (SN) or oil rubbed bronze (ORB) with frosted glass lens for a subtle approach. Offering light model in 3000k, high power factor and low THD.

Applications: commercial, residential, hospitality,entertainment and Hallways lighting.

Fixture Information

Size:	12W
Housing:	Die-formed cold rolled steel
Finish:	Protective powder coat
Color:	Standard: Satin Nickel (SN) Optional: Oil Rubbed Bronze (ORB)
Mounting:	Standard: Wall Mount
Lens:	High transmission acrylic
CRI:	90
Power Factor:	.98
THD:	<10%
Dimming:	120V Triac Dimming Type (Min. Dimming Level 3%)
Voltage:	Standard: 120V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

850 lm

Lumens Per Watt (typical):

70 lm/W

CCT:

3000K

Lifespan:

60,000 hrs


Ratings & Certificates

ETL/cETL Listed CEC Listed
CEC Listed, Meets Title24 JA8 Requirements
JA10 Flicker Free
Damp Location Listed

LITELUME™ seeks to deliver the most advanced and efficient LED technology. Due to technology progression, specifications may change. We reserve the right to update product specifications without notice. Contact LITELUME™ for the most up-to-date data.

Dimension

Item	Depth	Width	Height
12W	4″	5.1″	14.5″

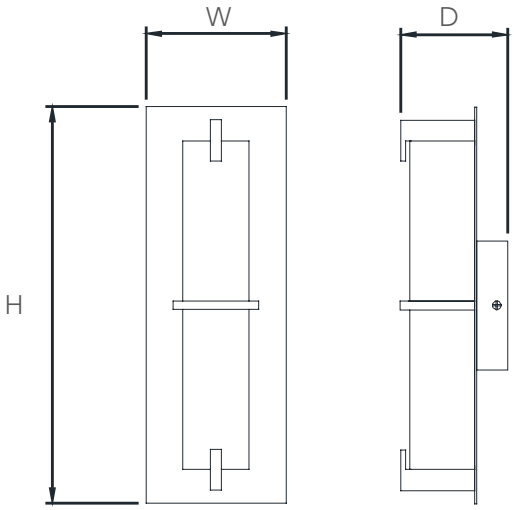

LITELUME™ seeks to deliver the most advanced and efficient LED technology. Due to technology progression, specifications may change. We reserve the right to update product specifications without notice. Contact LITELUME™ for the most up-to-date data.

Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-SMS-12-30-SN	12	850	3000	120V	Satin Nickel
LL-SMS-12-30-ORB	12	850	3000	120V	Oil Rubbed Bronze

LITELUME™ seeks to deliver the most advanced and efficient LED technology. Due to technology progression, specifications may change. We reserve the right to update product specifications without notice. Contact LITELUME™ for the most up-to-date data.