



Wall Mounted Square Downlight



Description

The LITELUME™ Wall Mounted Square Downlight (LL-WMSQD) and Wall Mounted Square Uplight Downlight (LL-WMSQUD) features a die-cast aluminum housing with a powder coated finish. This fixture features High Power Factor, and low THD. Universal voltage, multiple lumen package and size allows for use in residential and commercial applications.

Applications: Security, Pathway, Accent, Hallway and Walkway lighting.

Fixture Information

Size:	9W/18W
Housing:	Die-cast Aluminum
Finish:	Protective powdercoat
Color:	Standard: Black (BK)
Mounting:	Standard: Wall Mount
Lens:	Clear Glass
CRI:	80
Power Factor:	.90
Voltage:	Standard: 120-277V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

750 to 1600 lm

Lumens Per Watt (typical):

83 to 88 lm/W

CCT:

3000K

4000K

Lifespan:

50,000 running hours

Ratings & Certificates

ETL/cETL Listed
UL Wet Location Listed




Intertek



Dimension

Item	Depth	Width	Height
9W	6.5"	4.5"	8.3"
18W	6.5"	4.5"	12"

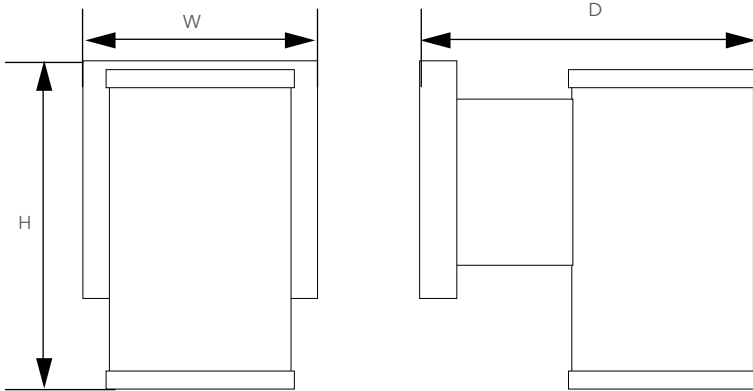



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Light
LL-WMSQD-9-40-UNV-BK	9	800	4000	120-277	Downlight
LL-WMSQD-9-30-UNV-BK	9	750	3000	120-277	Downlight
LL-WMSQUD-18-40-UNV-BK	18	1600	4000	120-277	Uplight/Downlight
LL-WMSQUD-18-30-UNV-BK	18	1500	3000	120-277	Uplight/Downlight

* Please contact LITELUME for all Custom Option Requests