



Garage Canopy Low Profile



*shown with Motion Sensor



*shown with Emergency Battery

Description

The LITELUME™ LED Garage canopy Low Profile (GCLP) is a low profile luminaire constructed with a IP65 rated one piece die cast housing suitable for both indoor and outdoor applications. Featuring a proprietary optical system with anti-glare lens making this fixture ideal for parking garages, storage areas, walkways and low or high security areas.

Fixture Information

Size:	20W/30W/45W/65W/90W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: White (WH) Custom Options: Black (BK) Dark Bronze (DB)
Mounting:	Standard: Ceiling, pendant
Lens:	Polycarbonate
CRI:	80
Surge Protector:	Optional: 10 kVA
Voltage:	Standard: 120-277V Custom Option: 347-480V
Sensor:	Standard: No sensor Bi-level motion sensor Remote control sensor Remote battery back-up kit
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

3,500 to 11,600 lm

Lumens Per Watt (typical):

128 to 167 lm/W

CCT:

4000K
5000K

Distribution

Type V

Lifespan:

Up to 100,000 running hours

Ratings & Certificates

UL Listed For Wet Location
DLC Qualified
IP66 rated
Title 24 Compliant
TAA Compliant/BAA Optional



QuickShip Ordering Information


Part #
LL-GCLP-30-50-UNV-WH
LL-GCLP-30-40-UNV-WH
LL-GCLP-45-50-UNV-WH
LL-GCLP-45-40-UNV-WH
LL-GCLP-65-50-UNV-WH
LL-GCLP-65-40-UNV-WH
LL-GCLP-90-50-UNV-WH
LL-GCLP-90-40-UNV-WH




Dimension

Item	Diameter	Height
30W Canopy w/o Motion Sensor	12"	3.32"
45W Canopy w/o Motion Sensor	12"	3.32"
65W Canopy w/o Motion Sensor	12"	3.32"
90W Canopy w/o Motion Sensor	13.03"	3.15"
28W Canopy with Motion Sensor	12"	4.21"
42W Canopy with Motion Sensor	12"	4.21"
65W Canopy with Motion Sensor	12"	4.21"
90W Canopy with Motion Sensor	13.03"	4.29"

No Motion Sensor



With Motion Sensor




Mounting


Suitable for J-BOX mounting and easy installation. Also supports pendant mounting with wires coming out from the back for easier wire connections.

Photometrics

General

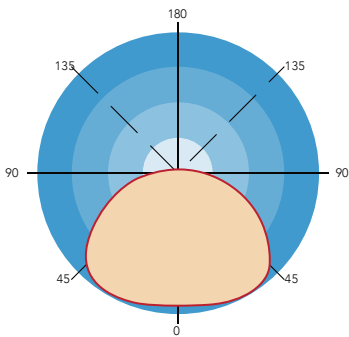

Parking Garage

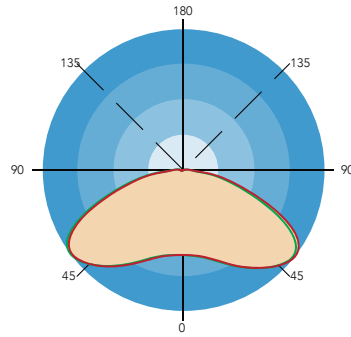



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-GCLP-30-50-UNV-WH	30	5000	5000	120-277
LL-GCLP-30-40-UNV-WH	30	4900	4000	120-277
LL-GCLP-45-50-UNV-WH	45	6500	5000	120-277
LL-GCLP-45-40-UNV-WH	45	6300	4000	120-277
LL-GCLP-65-50-UNV-WH	65	7700	5000	120-277
LL-GCLP-65-40-UNV-WH	65	7500	4000	120-277
LL-GCLP-[20][30][45][65]-2CCT-UNV-WH	20W/30W/45W/65W	3600/5000/6300/7700	4000K/5000K	120-277
LL-GCLP-90-50-UNV-WH	90	11600	5000	120-277
LL-GCLP-90-40-UNV-WH	90	11400	4000	120-277

* Please contact LITELUME for all Custom Option Requests

QuickShip Ordering Information

Part #
LL-GCLP-30-50-UNV-WH
LL-GCLP-30-40-UNV-WH
LL-GCLP-45-50-UNV-WH
LL-GCLP-45-40-UNV-WH
LL-GCLP-65-50-UNV-WH
LL-GCLP-65-40-UNV-WH
LL-GCLP-90-50-UNV-WH
LL-GCLP-90-40-UNV-WH

Mounting Ordering Information

Part #	Description
BRI823-B-D	Sharkward 120-277V 0-10V PIR Sensor
RC-100	Remote Control 100
C-EM-R-WH	Remote Emergency Battery Back-Up Kit For Canopy 8W White
SUB "UNV" WITH "480"	480 Volt *45W & 60W Only*

* Please contact LITELUME for all Custom Option Requests

Buy American Act Compliant Ordering Information

Part #	Description
BAA-GCLP	Buy American Act Compliant for Garage Canopy Low Profile

* Please contact LITELUME for all Custom Option Requests