



Wallpack Glass



Description

The LITELUME™ Wallpack Glass (LL-WPG) features a die-cast aluminum housing with a glass optical lens for long-lasting durability. Specification Grade, available for retrofit or new construction. Featuring 4 level lumen output and 3 level adjustable CCT, along with a standard ON/OFF photocell with dip switch. The sleek and low profile appearance brings modern aesthetics to a traditional wallpack.

Applications: Site, Hallway, Perimeter lighting and Walkway lighting.

Fixture Information

Size:	25W/30W/40W/50W/60W/70W/ 80W/90W/120W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powder coat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Grey (GY)
Mounting:	Standard: Wall Mount
Lens:	Glass
CRI:	80
Power Factor:	.90
THD:	<15%
Voltage:	Standard: 120-277V
Operating Temperature:	-40°F to 104°F
Sensor:	Standard: No sensor
Photocell:	Standard: Photocell with ON/OFF dip switch
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

4,000 to 16,500 lm

Lumens Per Watt (typical):

133 to 172 lm/W

CCT:

3000K
4000K
5000K

Distribution

Type III

Lifespan:

Up to 100,000 running hours

Ratings & Certificates


UL Listed For Wet Location
TAA Compliant/BAA Optional






Dimension

Item	Width	Length	Height
LL-WPG-[25][40][50][60]-3CCT-UNV-BZ-PC	4.43"	14.2"	9.25"
LL-WPG-[30][50][70][90]-3CCT-UNV-BZ-PC	4.43"	14.2"	9.25"
LL-WPG-[50][80][100][120]-3CCT-UNV-BZ-PC	4.5"	18"	9.75"

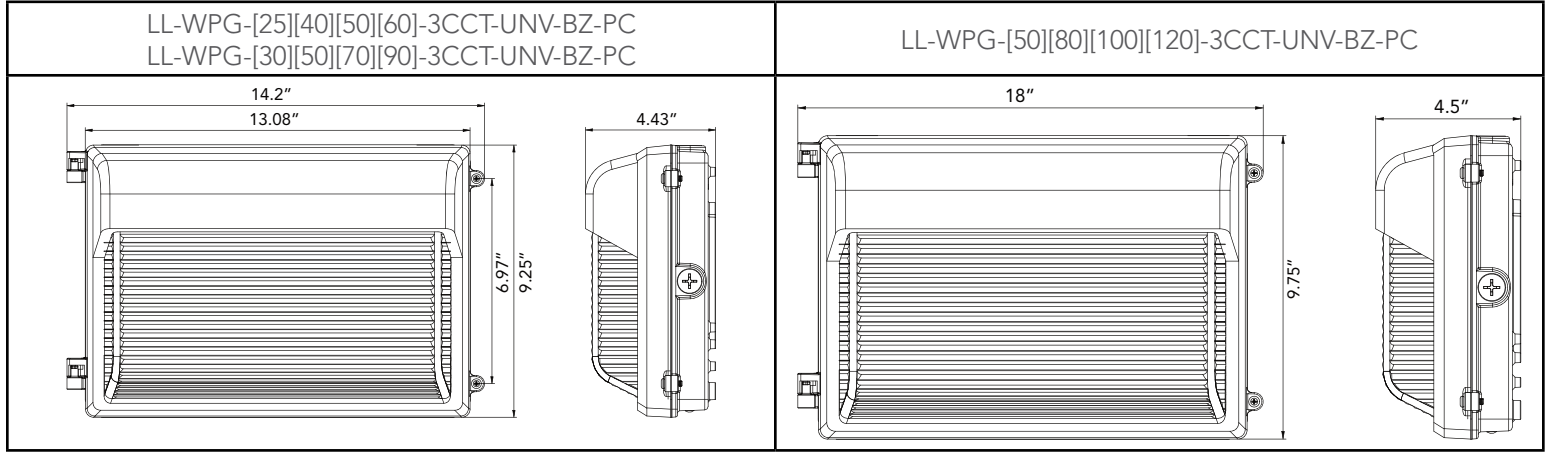


Features



Wattage and CCT Controller



Featuring 4 level lumen output and 3 level adjustable CCT




Power adjustment range:
20W/40W/50W/60W
30W/50W/70/90W
50W/80W/100W/120W

CCT selectable: 3000K, 4000K, 5000K

Photocell with ON/OFF DIP switch



SELECTABLE LUMENS



SELECTABLE CCT



Performance Data

LL-WPG-[25][40][50][60]-3CCT-UNV-BZ-PC							
Switch Setting	System Watts	3000K		4000K		5000K	
		Lumens	LPW	Lumens	LPW	Lumens	LPW
100%	60W	8000 lms	133 lm/W	8500 lms	142 lm/W	8200 lms	137 lm/W
80%	50W	7000 lms	140 lm/W	7500 lms	150 lm/W	7200 lms	144 lm/W
60%	40W	6000 lms	150 lm/W	6400 lms	160 lm/W	6200 lms	155 lm/W
40%	25W	4000 lms	160 lm/W	4300 lms	1172 lm/W	4200 lms	168 lm/W
LL-WPG-[30][50][70][90]-3CCT-UNV-BZ-PC							
Switch Setting	System Watts	3000K		4000K		5000K	
		Lumens	LPW	Lumens	LPW	Lumens	LPW
100%	90W	12000 lms	133 lm/W	12500 lms	139 lm/W	12200 lms	136 lm/W
80%	70W	9800 lms	140 lm/W	10200 lms	145 lm/W	9900 lms	142 lm/W
60%	50W	7500 lms	150 lm/W	7800 lms	155 lm/W	7600 lms	152 lm/W
40%	30W	4800 lms	160 lm/W	5000 lms	165 lm/W	4900 lms	162 lm/W
LL-WPG-[50][80][100][120]-3CCT-UNV-BZ-PC							
Switch Setting	System Watts	3000K		4000K		5000K	
		Lumens	LPW	Lumens	LPW	Lumens	LPW
100%	120W	16000 lms	133 lm/W	16500 lms	138 lm/W	16200 lms	135 lm/W
80%	100W	14000 lms	140 lm/W	14500 lms	145 lm/W	14200 lms	142 lm/W
60%	80W	12000 lms	150 lm/W	12500 lms	156 lm/W	12200 lms	153 lm/W
40%	50W	8000 lms	160 lm/W	8500 lms	170 lm/W	8200 lms	164 lm/W



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-WPG-[25][40][50][60]-3CCT-UNV-BZ-PC	25W/40W/50W/60W	4300/6400/7500/8500	3000K 4000K 5000K	120-277
LL-WPG-[30][50][70][90]-3CCT-UNV-BZ-PC	30W/50W/70W/90W	5000/7800/10200/12500	3000K 4000K 5000K	120-277
LL-WPG-[50][80][100][120]-3CCT-UNV-BZ-PC	50W/80W/100W/120W	8500/12500/14500/16500	3000K 4000K 5000K	120-277

Accessories Ordering Information

Part #	Description
EM8	Emergency Battery Back Up 8W

* Please contact LITELUME for all Custom Option Requests

Buy American Act Compliant Ordering Information

Part #	Description
BAA-WPG	Buy American Act Compliant for Wallpack Glass

* Please contact LITELUME for all Custom Option Requests