

# Flood Light Extra Large Double Size



### Description

The LITELUME™ Floodlight (LL-FL) Extra Large Double Size is a high performance LED solution designed with versatility and a slim, low profile design. The rugged, die-cast aluminum housing with UV resistant powder coat finish minimizes wind load requirements and features an integral, watertight LED driver compartment along with high performance aluminum heat sinks.

Applications: Parking lots, Auto dealerships, Billboard, Façade, Wall Washing, Landscape, and general outdoor lighting.

350W

Die-cast Aluminum Housing

High Performance Acrylic NEMA

Custom: Button Photocell (120-277V)

Optional NEMA 4H\*4V optics.

Protective powdercoat

Standard: Bronze Custom Options:

Black (BK)

Grey (BY)

80

White (WH)

Yoke Mount

7H\*6V optics.

Optional: 10 kVA Standard: 120-277V

Standard: No sensor

10-Year Limited Warranty

## **Performance Data**

#### Lumen Output:

48,000 to 50,000 lm

#### Lumens Per Watt (typical):

137 to 142 lm/W

**CCT:** 3000K 4000K 5000K

#### **Beam Angle:**

7H\*6V Optional 4H\*4V

#### Lifespan:

Up to 100,000 running hours

#### Ratings & Certificates

UL Listed For Wet Location IP65 rated TAA Compliant/BAA Optional



Wattage Replacement				
Existing Watts	Litelume Watts			
1000-1500W	350W			

## Housing:

**Fixture Information** 

Finish:

Size:

Color:

Mounting:

Lens:

CRI: Surge Protector: Voltage: Sensor:

Warranty:

www.litelume.com Page 1/3


833.LED.LUME

Page 1/3 LITELUME™ seeks to deliver the most advanced and efficient LED technology. Due to technology progression, specifications may change. We reserve the right to update product specifications without notice. Contact LITELUME™ for the most up-to-date data.




#### Dimension

Item	Width	Length	Height	Weight
Floodlight Large Extra Large Double Size	5.23″	16.64″	19.27″	31.27″



## **Photometrics**

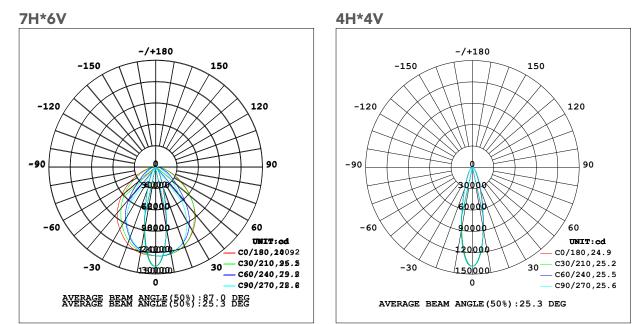



Project Name	
Catalog #	
Job Type Prepared By	
Prepared By	
Notes	

## **Fixture Ordering Information**

Part #	Wattage	Lumens	Kelvin	Voltage	Beam Angle
LL-FL-350-50-UNV-N76-BZ-YM	350	50000	5000	120-277	7H*6V
LL-FL-350-40-UNV-N76-BZ-YM	350	50000	4000	120-277	7H*6V
LL-FL-350-30-UNV-N76-BZ-YM	350	48000	3000	120-277	7H*6V
LL-FL-350-50-UNV-N44-BZ-YM	350	49500	5000	120-277	4H*4V
LL-FL-350-40-UNV-N44-BZ-YM	350	49500	4000	120-277	4H*4V
LL-FL-350-30-UNV-N44-BZ-YM	350	48000	3000	120-277	4H*4V

### **Accessories Ordering Information**

Part #	Description
PC	Button Photocell, 120-277V
SUB"UNV" WITH "480"	480 Volt

\* Please contact LITELUME for all Custom Option Requests

## **Buy American Act Compliant Ordering Information**

Part #	Description	
BAA-FL350	Buy America Act Compliant For Floodlight 350W	
	* Please contact LITELUME for all Custom Op	otion Request