



Wallpack Small



Description

The LITELUME™ Wallpack Small (LL-WPS) features a die-cast aluminum housing with a clear PC lens for long-lasting durability. Field adjustable light engine, CCT and Wattage Selectable.

Applications: Hallway, Perimeter lighting and Walkway lighting.

Fixture Information

Size:	12W/18W/24W/30W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Grey (GY)
Mounting:	Standard: Wall Mount
Lens:	Standard: PC Optional: Borosilicate Glass
Power Factor:	.90
CRI:	80
THD:	<20%
Operating Temperature:	-40°F to 104°F
Surge Protection:	Optional: 10 kVA
Voltage:	Standard: 120-277V
Dimmable:	Standard: 0-10v continuous, 12Vdc auxiliary dimming
Sensor:	Standard: Photocell with ON/OFF DIP switch Standard: Sharkward Base Plug and Play ready
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

2,000 to 4,500 lm

Lumens Per Watt (typical):

143-175 lm/W

CCT:

3000K

4000K

5000K

Lifespan:

Up to 100,000 running hours

Ratings & Certificates

UL Listed For Wet Location

Title 24 Compliant


TAA Compliant/BAA Optional





Dimension

Item	Width	Length	Height
WPS	12"	7.1"	7.7"

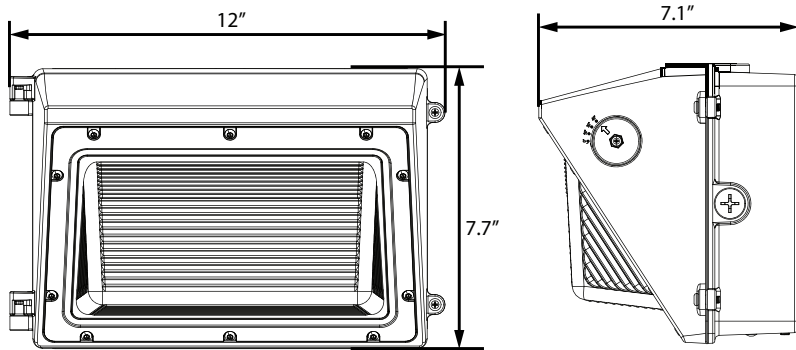


CCT and Wattage Adjustable

LL-WPS @ 45 Degree Setting								
Switch Setting	System Watts	CRI	3000K		4000K		5000K	
			Lumens	LPW	Lumens	LPW	Lumens	LPW
100%	30W	80	4300 lms	143 lm/W	4500 lms	150 lm/W	4350 lms	145 lm/W
80%	24W	80	3600 lms	150 lm/W	3800 lms	158 lm/W	3650 lms	152 lm/W
60%	18W	80	2800 lms	156 lm/W	3000 lms	167 lm/W	2850 lms	158 lm/W
40%	12W	80	2000 lms	167 lm/W	2100 lms	175 lm/W	20300 lms	169 lm/W




Features

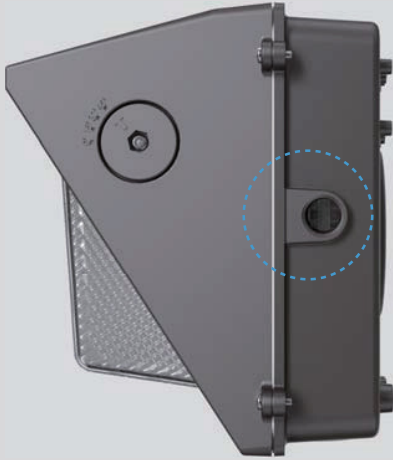

CCT and Wattage

This fixture has the function of adjusting the lumens output and color temperature on-site.

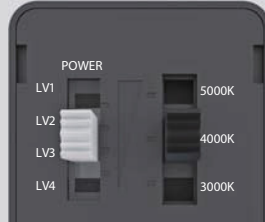

SELECTABLE LUMENS

SELECTABLE CCT

Power adjustment range:
100%-80%-60%-40%



CCT selectable:
3000K, 4000K, 5000K



Plug and Play PIR Sensor (Optional)

Control the light throw with a spin of a dial

All WPL models include a powerful feature that can adjust the tilt of the light engine, enabling field adjustment of the degree of light thrown forward. Choose 0°, 15°, 30° or 45° to control where the light gets thrown.

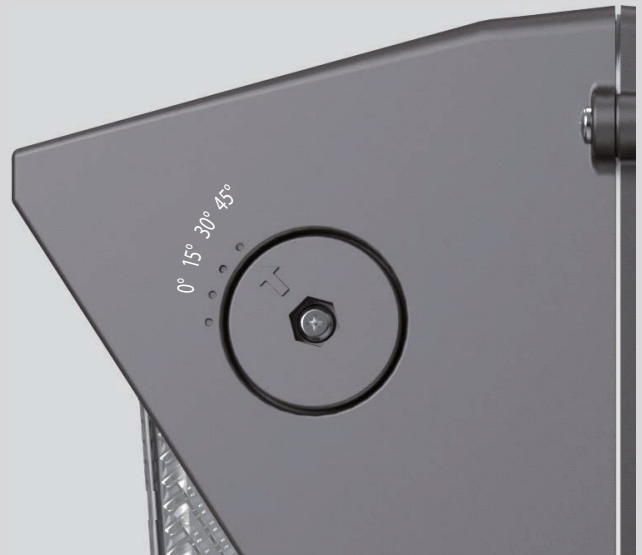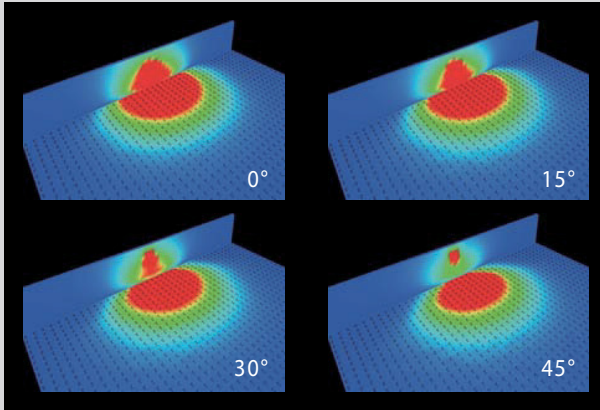

Photocell Cap





Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-WPS-[12][18][24][30]-3CCT-UNV-BZ-PC	12W/18W/24W/30W	4200/6000/7500/8900	3000K 4000K 5000K	120-277

* Please contact LITELUME for all Custom Option Requests

Accessories Ordering Information

Part #	Description
ANT-6-4T	Sharkward 12-24V DC 0-10V Plug And Play PIR Sensor
ANT-6-4T-BLE-GE	Homewell GEBC 12-24V DC 0-10V Plug And Play Bluetooth PIR Sensor
RC-100	Remote Control 100
EM5	Emergency Battery Back Up 5W
WPS-G	Borosilicate Glass Lens For Wallpack Large

* Please contact LITELUME for all Custom Option Requests

Buy American Act Compliant Ordering Information

Part #	Description
BAA-WPS	Buy American Act Compliant for Wallpack Small

* Please contact LITELUME for all Custom Option Requests