


Retrofit Kit Extra Large





Description

The LITELUME RETROFIT KIT EXTRA LARGE RETROLUME SERIES (LL-RKXL) features a rigid die cast innovative optic design. High quality Nichia LEDS powered with a Meanwell driver and simple installation allows for complete upgrade while restoring fixtures originality.

Applications: Area Lights, Flood lights, Wall packs, Canopies, General, and spec grade municipality fixtures.

Performance Data

Lumen Output:

33336 to 43514 lm

Lumens Per Watt (typical):

120 to 127 lm/W

CCT:

4000K 5000K

Lifespan:

Features High Quality Nichia LED's with up to 100,000 running hours

Ratings & Certificates

ETL Listed



Fixture Information

Size: Housing: Finish: Fan: Driver: LEDs: Dimmable: Replacement: Operating Temperature: Power Factor: CRI: Voltage:

Surge Protector: Warranty:

280W/320W/350W Die-cast aluminum housing


Protective powdercoat Sunon Meanwell Nichia Optional 750-1000W MH/HPS -25°C to 55°C .95 80 120-277V 480V optional


No Sensor 10-Year Limited Warranty

LITELUME ©Lite Lume Corporation 2018 Page 1/3



Dimensions

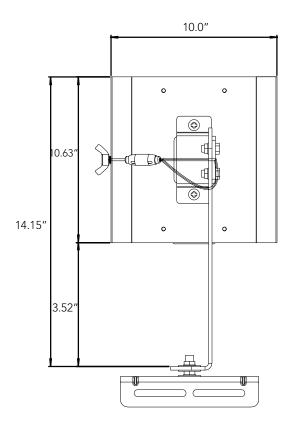

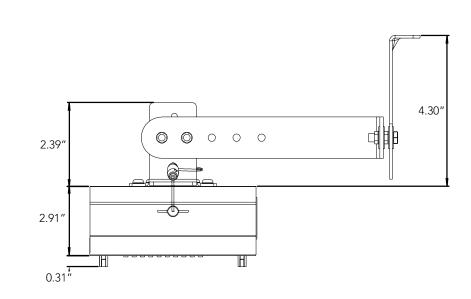

LITELUME^{*} www.litelume.com ©Lite Lume Corporation 2018 833.LED.LUME

Page 2/3



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Type Distribution
LL-RKXL-280-50-UNV	280	35133	5000	120-277	Т5
LL-RKXL-280-40-UNV	280	33376	4000	120-277	Т5
LL-RKXL-320-50-UNV	320	40020	5000	120-277	Т5
LL-RKXL-320-40-UNV	320	38019	4000	120-277	Т5
LL-RKXL-350-50-UNV	350	43514	5000	120-277	Т5
LL-RKXL-350-40-UNV	350	41338	4000	120-277	Т5

Accessories Ordering Information

Part #	Description
SUB "UNV" with "480"	480 Volt

* Please contact LITELUME for all Custom Option Requests

* Please contact LITELUME for all Custom Option Requests

Page 3/3