



# Contemporary Wall Facade



## Description

The LITELUME™ Contemporary Wall Facade (LL-CWF) luminaire incorporates a traditional fresh design. Features a die-formed cold rolled steel housing in oil rubbed bronze with frosted glass lens for a subtle approach. Offering light model in 3000k, high power factor and low THD.

Applications: commercial, residential, hospitality, entertainment and Hallways lighting.

## Fixture Information

Size:	15W
Housing:	Die-formed cold rolled steel
Finish:	Protective powder coat
Color:	Standard: Oil Rubbed Bronze (ORB)
Mounting:	Standard: Wall Mount
Lens:	High transmission acrylic
CRI:	90
Power Factor:	.98
THD:	<10%
Dimming:	120V Triac Dimming Type (Min. Dimming Level 3%)
Voltage:	Standard: 120V
Warranty:	10-Year Limited Warranty

## Performance Data

### Lumen Output:

1050 lm

### Lumens Per Watt (typical):

66 lm/W

### CCT:

3000K

### Lifespan:

60,000 hrs

## Ratings & Certificates

ETL/cETL Listed

CEC Listed

CEC Listed, Meets Title24 JA8 Requirements

JA10 Flicker Free


Damp Location Listed





## Dimension

Item	Depth	Width	Height
15W	3.5"	8.0"	14.2"

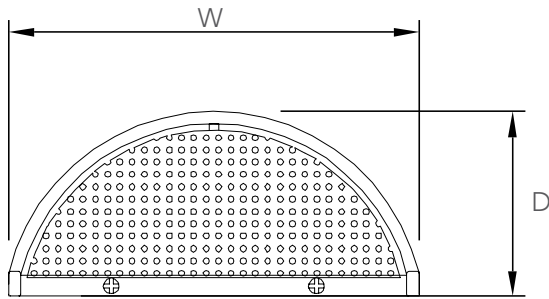



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

### Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-CWF-15-30-120-ORB	15	1050	3000	120V	Oil Rubbed Bronze

### Built In Emergency Light Model (4W EM)

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-CWF-EM-15-30-120-ORB	15	1050	3000	120	Oil Rubbed Bronze