



Description

Wet Location Semi-Recessed MR-16 Emergency Unit

Illumination:

- Two fully adjustable semi-recessed, round LED MR16 lamp heads for optimal light distribution.
- Ultra-bright, energy efficient, long-life White LED lamps provide up to 76-ft center-to-center spacing with 3-ft path of egress at 7.5-ft mounting height.

Electrical:

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- Wall mount via knockouts on the back of the housing.

Housing:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in gray or black finish.
- Fully gasketed clear polycarbonate cover offers protection against wet, non-hazardous dust, corrosive atmospheres and to water spray or splashing water locations.

Options:

- CW: Optional internal heater and battery blanket for extreme cold temperature applications, (-25°C – 40°C).
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- CEC: Certified to CEC under Title 20 Regulations


Warranty/Listing:

- Seven year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (20°C – 40°C).



LISTED

Dimensions:

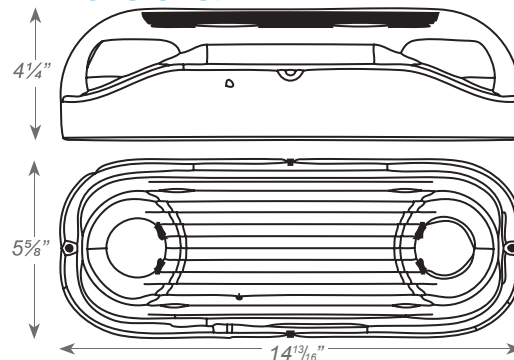



| | |
|--------------|--|
| Project Name | |
| Catalog # | |
| Job Type | |
| Prepared By | |
| Notes | |

Fixture Ordering Information

| Model | Housing Color | | Wet Location | | Lamp | | Options | |
|--------------|---------------|---------------|--------------|--------------|------|---|-------------------------|--|
| LL-RMR-16-WP | Blank B | Gray Black | WP | Wet Location | PLED | 7.0W High Lumen White LED Lamps standard | CW USA SDT CEC | Internal heater with battery blanket Assembled in USA Self-Diagnostics ¹ Certified to CEC under Title 20 Regulations |

¹ Not available with CEC option

Electrical Information

| Catalog Number | Input Watts (W) | | Input Amps (A) | |
|--------------------------|-----------------|------|----------------|-------|
| | 120V | 277V | 120V | 277V |
| LL-RMR-16-WP-PLED | 6.0 | 6.2 | 0.053 | 0.025 |
| LL-RMR-16-WP-CW-PLED | 5.3 | 6.0 | 0.050 | 0.025 |
| LL-RMR-16-WP-SDT-PLED | 5.5 | 6.7 | 0.050 | 0.030 |
| LL-RMR-16-WP-SDT-CW-PLED | 5.5 | 6.7 | 0.050 | 0.030 |