



# Pendant Series A



## LL-PSA

### Pendant Series A

The LITELUME™ Pendant Series A (LL-PSA) features a die-formed cold rolled steel housing in satin nickel or oil rubbed bronze with an opal glass shade for an elegant soft appearance.



#### PERFORMANCE DATA

Lumen Output	800 - 2400 lm
Lumens Per Watt (typical)	89 lm/W
CCT	3000K 4000K
Lifespan	30,000 hrs

#### RATINGS & CERTIFICATES

Energy Star • cULus Listed


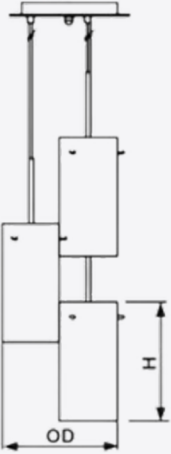
#### APPLICATIONS

Dining • Vanity • Bathrooms • Hospitals  
Schools • Restaurants • Offices • Hallways  
Commercial, Residential & Hospitality

#### FIXTURE INFORMATION

Size	Housing	Shade	Lamp	Mounting	Color	
9W - 27W	Die-Formed Cold-Rolled Steel	Opal Glass	Omni Directional Dimmable E26 LED Bulb	Ceiling	<ul style="list-style-type: none"> <li>• Black</li> <li>• Satin Nickel</li> <li>• Oil Rubbed Bronze</li> </ul>	
Voltage	Dimming Range	Dimming Protocol	PF	THD	CRI	Warranty
120V	1%	Triac (Leading Edge)	.98	<10%	80	10 Year

## DIMENSIONS

1 Lamp	3 Lamp
	
<p><b>(OD x H x H1)</b> 3.5" x 8.5" x 6.0'</p>	<p><b>(OD x H x H1)</b> 3.5" x 8.5" x 6.0'</p>
<p><b>Note:</b> H1- Hanging Cable Length</p>	<p><b>Note:</b> H1- Hanging Cable Length</p>



# Pendant Series A

PROJECT NAME	
CATALOG #	
JOB TYPE	
PREPARED BY	
NOTES	

## ORDERING GUIDE

Brand	Fixture Type	Lamps	
LL LITELUME	PSA Pendant Series A	1 1 Lamp 3 3 Lamp	
Watts	CCT	Voltage	Color
9 9W 27 27W	40 4000K 30 3000K	120 120V	SN Satin Nickel ORB Oil Rubbed Bronze BK Black

## FIXTURE ORDERING INFORMATION

Part #	Watts	Lumens	Kelvin	Voltage
LL-PSA-1-9-40-120-SN	9	800	4000	120
LL-PSA-1-9-40-120-BK	9	800	4000	120
LL-PSA-1-9-40-120-ORB	9	800	4000	120
LL-PSA-1-9-30-120-SN	9	800	3000	120
LL-PSA-1-9-30-120-BK	9	800	3000	120
LL-PSA-1-9-30-120-ORB	9	800	3000	120
LL-PSA-3-27-40-120-SN	27	2400	4000	120
LL-PSA-3-27-40-120-BK	27	2400	4000	120
LL-PSA-3-27-40-120-ORB	27	2400	4000	120
LL-PSA-3-27-30-120-SN	27	2400	3000	120
LL-PSA-3-27-30-120-BK	27	2400	3000	120
LL-PSA-3-27-30-120-ORB	27	2400	3000	120