



# LL-MCF

## Modern Classic Facade

The LITELUME™ Modern Classic Facade (LL-MCF) luminaire incorporates a traditional fresh design. Features a die-formed cold rolled steel housing with opal polycarbonate lens for a subtle approach. Offering light model in 3000k or Field Selectable CCT with high power factor and low THD.



### PERFORMANCE DATA

Lumen Output	925 - 990 lm
Lumens Per Watt (typical)	66 lm/W
CCT	3000K 3500K 4000K (3000K and Field Selectable CCT Version)
Lifespan	60,000 hrs

### RATINGS & CERTIFICATES

ETL Listed • Wet Location • JA8 • Title 24

### APPLICATIONS


Commercial • Residential • Hospitality  
Entertainment • Hallway Lighting

### FIXTURE INFORMATION

Size	Housing	Finish	Lens		Mounting	Color	
15W	Die-Formed Cold-Rolled Steel	Protective Powder Coat	Opal Polycarbonate		Standard: Wall Mount	<ul style="list-style-type: none"> <li>• Black</li> <li>• White</li> <li>• Gray</li> <li>• Custom</li> <li>• Oil Rubbed Bronze</li> </ul>	
Voltage		Controls		PF	THD	CRI	Warranty
120 - 277V		Optional: Photocell		.98	<10%	90	10 Year

**DIMENSIONS**


LL-MCF-15-3CCT-UNV

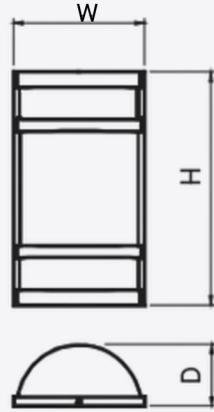

L x H x D  
14.6" x 8.3" x 3.8"

**DIMENSIONS**

LL-MCF-15-30-UNV

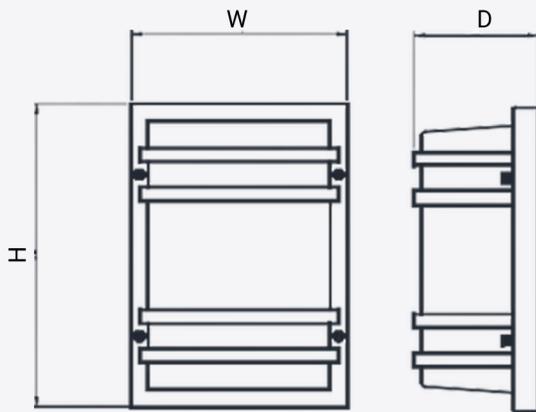

L x H x D  
14.1" x 10.0" x 5.7"



PROJECT NAME	
CATALOG #	
JOB TYPE	
PREPARED BY	
NOTES	

**ORDERING GUIDE**

Brand	Fixture Type	Wattage	CCT
LL LITELUME	MCF Modern Classic Facade	15 15W	30 3000K 3CCT Selectable Color Temperature
Voltage	Finish	Accessories	
UNV 120-277V	BK Black ORB Oil Rubbed Bronze WH White GY Gray CUS Custom	PC Photocell EM Emergency Battery Back Up	

**FIXTURE ORDERING INFORMATION**

Part #	Watts	Lumens	Kelvin	Voltage
LL-MCF-15-30-UNV-BK	15	925	3000	120-277
LL-MCF-15-30-UNV-ORB	15	925	3000	120-277
LL-MCF-15-30-UNV-WH	15	925	3000	120-277
LL-MCF-15-30-UNV-GY	15	925	3000	120-277
LL-MCF-15-30-UNV-CUS	15	925	3000	120-277



**FIXTURE ORDERING INFORMATION**

Part #	Watts	Lumens	Kelvin	Voltage
LL-MCF-15-3CCT-UNV-BK	15	990	3000K/3500K/4000K	120-277
LL-MCF-15-3CCT-UNV-ORB	15	990	3000K/3500K/4000K	120-277
LL-MCF-15-3CCT-UNV-WH	15	990	3000K/3500K/4000K	120-277
LL-MCF-15-3CCT-UNV-GY	15	990	3000K/3500K/4000K	120-277
LL-MCF-15-3CCT-UNV-CUS	15	990	3000K/3500K/4000K	120-277

**ACCESSORIES ORDERING INFORMATION**

Part #	Description
PC	Photocell
EM	Emergency Battery Back Up