



# Wrap Around Narrow



## Description

## Fixture Information

Size:	30W/39W/47W
Housing:	Steel
Lens:	PC
Finish:	Protective powder coat
Color:	Color: Standard: White
Mounting:	Standard: Ceiling
Operating Temperature:	-13°F to 122°F
Power Factor:	>.90
CRI:	80
Dimmable:	Standard: 0-10v continuous Flicker-free per IEEE1789-2015 (no observable adverse effects of flicker at 100% light output level).
Voltage:	Standard: 120-277V
Warranty:	10-Year Limited Warranty

## Performance Data

### Lumen Output:

3,827 to 5,732 lm

### Lumens Per Watt (typical):

118 - 131 lm/W

### CCT:

3500K

4000K

5000K

### Lifespan:

Long-life LEDs provide 196,000 hours of operation with at least 70% of initial lumen output (L70), and 60,000 hours with at least 90% of initial lumen output (L90).

## Ratings & Certificates


UL Listed For Damp Location





## Dimension

Item	Width	Length	Height
LL-WAN	5.4"	47.6"	2"

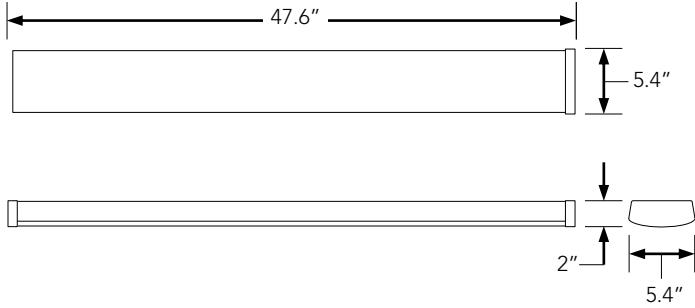

## Electrical Data


Series	Measurements	Low Lumens			Mid Lumens			High Lumens		
		3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
LL-WAN	Lumens	3827	3925	3966	4756	5017	4936	5531	5880	5732
	Watts	30	30	30	39	39	39	47	45	47
	Efficacy	126	131	131	122	128	127	118	131	122
	Input Current (A)	120V=0.25A	120V=0.25A	120V=0.25A	120V=0.33A	120V=0.33A	120V=0.33A	120V=0.39A	120V=0.38A	120V=0.39A
		240V=0.13A	240V=0.13A	240V=0.13A	240V=0.16A	240V=0.16A	240V=0.16A	240V=0.20A	240V=0.19A	240V=0.20A
277V=0.11A		277V=0.11A	277V=0.11A	277V=0.14A	277V=0.14A	277V=0.14A	277V=0.17A	277V=0.16A	277V=0.17A	

## Photometric Data

### LL-WAN Luminaire Details

Description:	Wrap Around Narrow
Total Lumens:	5,734
Input Wattage	47
Efficacy (lm/W)	123
Spacing Criterion (0-180°)	1.22
Spacing Criterion (90-270°)	1.14

Zonal Lumen Summary		
Zone	Lumens	% Fixt
0-20°	795	13.9%
0-30°	1667	29.1%
0-40°	2683	46.8%
20-50°	2897	50.5%
40-70°	2517	43.9%
0-60°	4560	79.5%
0-80°	5568	97.1%
0-90°	5694	99.3%
90-180°	40	0.7%
0-180°	5734	100%

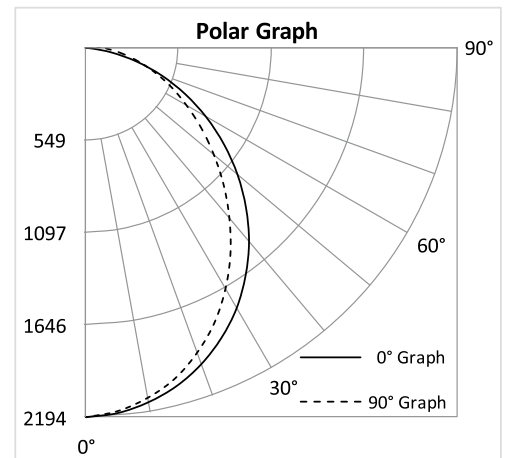



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

<b>Part #</b>	<b>Wattage</b>	<b>Lumens</b>	<b>CCT</b>	<b>Voltage</b>
LL-WAN-[30][39][47]-3CCT-UNV	30W/39W/47W	3925/5017/5880	3500K 4000K 5000K	120-277