



Wallpack Large



Description

The LITELUME™ Wallpack Large (LL-WPL) features a die-cast aluminum housing with a clear PC lens for long-lasting durability. Field adjustable light engine, CCT and Wattage Selectable.

Applications: Hallway, Perimeter lighting and Walkway lighting.

Fixture Information

Size:	60W/90W/120W/150W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Grey (GY)
Mounting:	Standard: Wall Mount
Lens:	Standard: PC Optional: Borosilicate Glass
Power Factor:	.90
CRI:	80
THD:	<20%
Operating Temperature:	-40°F to 104°F
Surge Protection:	Optional: 10 kVA
Voltage:	Standard: 120-277V
Dimmable:	Standard: 0-10v continuous, 12Vdc auxiliary dimming
Sensor:	Standard: Photocell with ON/OFF DIP switch Standard: Sharkward Base Plug and Play ready
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

9,000 to 22,000 lm

Lumens Per Watt (typical):

133-167 lm/W

CCT:

3000K

4000K

5000K

Lifespan:

Up to 100,000 running hours

Ratings & Certificates

UL Listed For Wet Location

Title 24 Compliant


TAA Compliant/BAA Optional





Dimension

Item	Width	Length	Height
WPL	18"	9.25"	9.75"

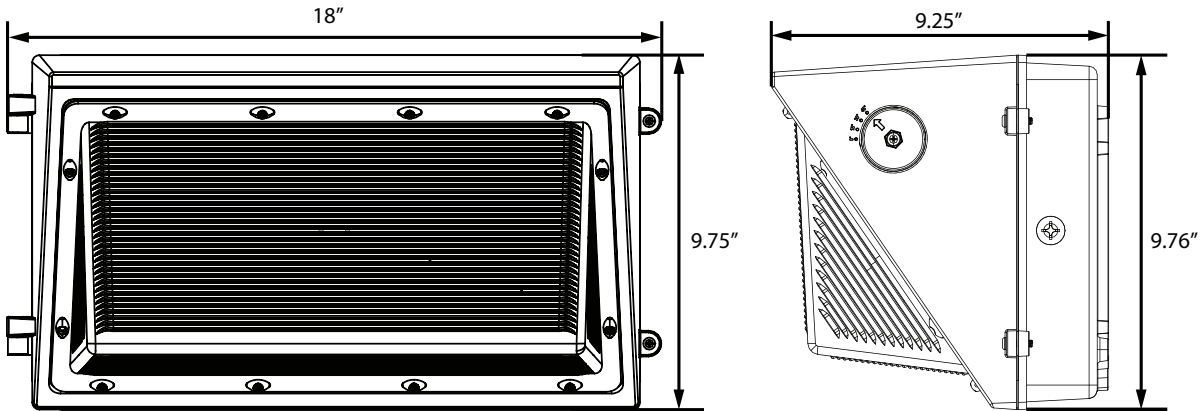


CCT and Wattage Adjustable

LL-WPL @ 45 Degree Setting								
Switch Setting	System Watts	CRI	3000K		4000K		5000K	
			Lumens	LPW	Lumens	LPW	Lumens	LPW
100%	150W	80	20000 lms	133 lm/W	22000 lms	147 lm/W	21000 lms	140 lm/W
80%	120W	80	16500 lms	138 lm/W	18500 lms	154 lm/W	17500 lms	146 lm/W
60%	90W	80	13000 lms	144 lm/W	14500 lms	161 lm/W	13800 lms	153 lm/W
40%	60W	80	9000 lms	150 lm/W	10000 lms	167 lm/W	9600 lms	156 lm/W




Features

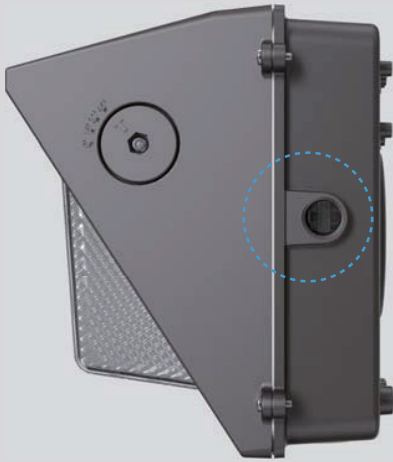

CCT and Wattage

This fixture has the function of adjusting the lumens output and color temperature on-site.

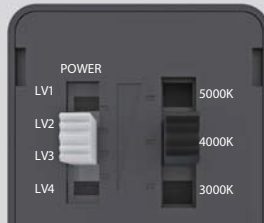

SELECTABLE LUMENS

SELECTABLE CCT

Power adjustment range:
100%-80%-60%-40%



CCT selectable:
3000K, 4000K, 5000K



Plug and Play PIR Sensor (Optional)

Control the light throw with a spin of a dial

All WPL models include a powerful feature that can adjust the tilt of the light engine, enabling field adjustment of the degree of light thrown forward. Choose 0°, 15°, 30° or 45° to control where the light gets thrown.

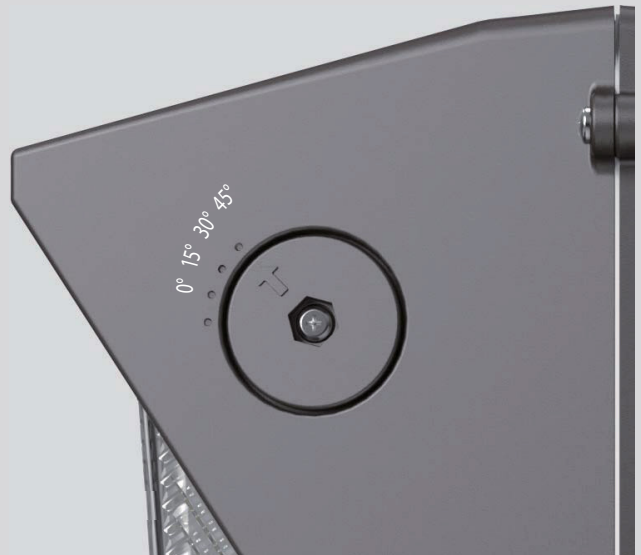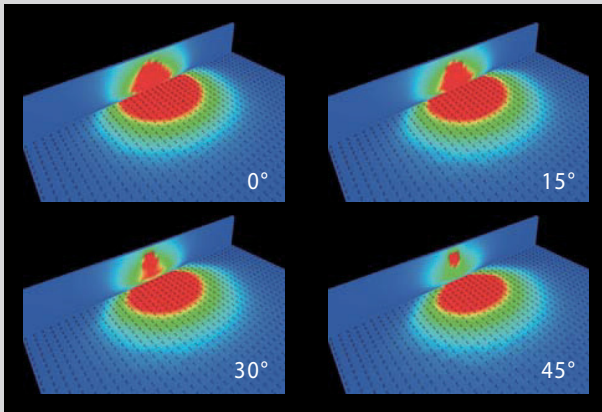

Photocell Cap





Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-WPL-[60][90][120][150]-3CCT-UNV-BZ-PC	60W/90W/120W/150W	10000/14500/18500/22000	3000K 4000K 5000K	120-277

* Please contact LITELUME for all Custom Option Requests

Accessories Ordering Information

Part #	Description
ANT-6-4T	Sharkward 12-24V DC 0-10V Plug And Play PIR Sensor
ANT-6-4T-BLE-GE	Homewell GEBC 12-24V DC 0-10V Plug And Play Bluetooth PIR Sensor
RC-100	Remote Control 100
EM8	Emergency Battery Back Up 8W
WPL-G	Borosilicate Glass Lens For Wallpack Large

* Please contact LITELUME for all Custom Option Requests

Buy American Act Compliant Ordering Information

Part #	Description
BAA-WPL	Buy American Act Compliant for Wallpack Large

* Please contact LITELUME for all Custom Option Requests