



Description

Thin Thermoplastic Exit Sign

Illumination:

- Ultra bright, energy efficient, long life Red or Green LEDs.

Electrical:

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- Mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

Housing:


- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Specification-grade, low profile thin plastic design.
- EZ snap-out Chevron directional indicators.
- Patented, field selectable universal single / double face configuration.

Warranty/Listing:

- Seven year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.



Dimensions:

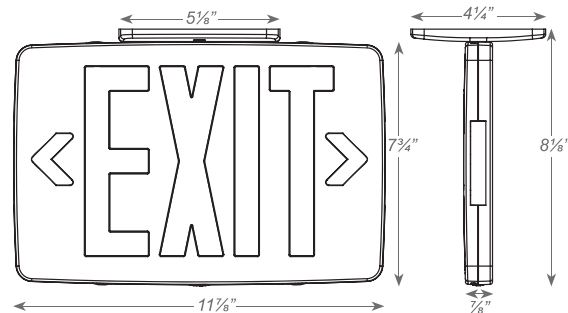



| | |
|---------------------|--|
| Project Name | |
| Catalog # | |
| Job Type | |
| Prepared By | |
| Notes | |

Fixture Ordering Information

| Model | No. of Faces | Letter Color | Housing Color | Battery | | | | |
|-----------|--------------|----------------------------------|---------------|--------------|--------|----------------|---------------|------------------------------|
| LL-ETXTEU | 3 | Universal Single/ Double Face | R G | Red Green | W B | White Black | (blank) EM | AC-Only Battery Backup |