



# Bollard Luminaire 360



## Description

The LITELUME™ Bollard Luminaire 360 (LL-BL360) is a subtle luminaire with a high efficacy soft lens allowing zero uplight. 360 degree illumination with a Robust Ground Cage pre-buried installation.

Applications: Security, Pathway, Perimeter, Pedestrian and Walkway lighting.

## Fixture Information

Size:	26W
Housing:	Die-cast Aluminum
Finish:	Polyester powder coat
Color:	Standard: Bronze, Custom Options: Black(BK) White (WH) and Gray (GY)
Temperature:	-40°F to +113°F
Power Factor:	.90
CRI:	80
Voltage:	Standard: 120-277V
Warranty:	5-Year Limited Warranty

## Performance Data

### Lumen Output:

3000 to 3100 lm

### Lumens Per Watt (typical):

115 to 119 lm/W

### CCT:

3000K  
4000K

### Distribution:

T5 120D

### Lifespan:

100,000 hrs

### Ratings & Certificates


cULus Listed for Wet Location  
IP65





### Dimension

Item	Height	Diameter	Weight
26W	42.00"	9.28"	12.13lbs

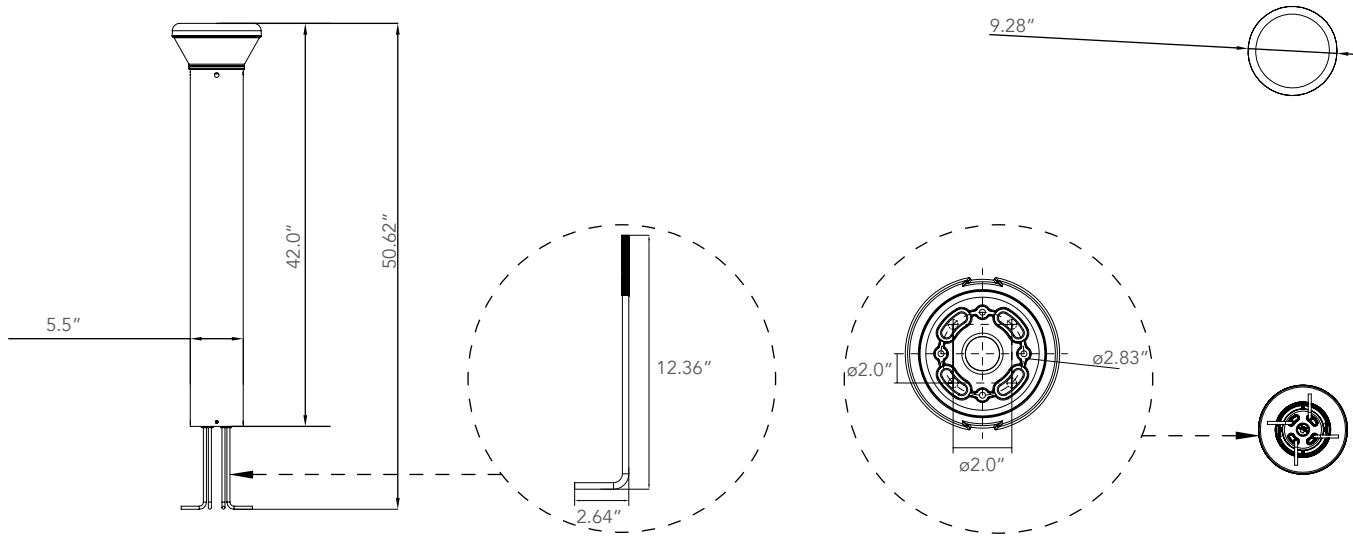



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-BL360-26-40-UNV-BZ	26	3100	4000	120-277V	Bronze
LL-BL360-26-30-UNV-BZ	26	3000	3000	120-277V	Bronze

\* Please contact LITELUME for all Custom Option Requests