



# Garage Canopy Low Profile



\*shown with Motion Sensor



\*shown with Emergency Battery

## Description

The LITELUME™ LED Garage canopy Low Profile (GCLP) is a low profile luminaire constructed with a IP65 rated one piece die cast housing suitable for both indoor and outdoor applications. Featuring a proprietary optical system with anti-glare lens making this fixture ideal for parking garages, storage areas, walkways and low or high security areas.

## Fixture Information

Size:	30W/45W/65W/90W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: White (WH) Custom Options: Black (BK) Dark Bronze (DB)
Mounting:	Sold separately
Lens:	Polycarbonate
CRI:	80
Surge Protector:	Optional: 10 kVA
Voltage:	Standard: 120-277V Custom Option: 347-480V
Sensor:	Standard: No sensor Bi-level motion sensor Remote control sensor Remote battery back-up kit
Warranty:	10-Year Limited Warranty

## Performance Data

### Lumen Output:

3,800 to 11,600 lm

### Lumens Per Watt (typical):

117 to 129 lm/W

### CCT:

4000K  
5000K

### Distribution

Type V

### Lifespan:

Features Philip Lumileds with up to 100,000 running hours

## Ratings & Certificates

UL Listed For Wet Location  
DLC Qualified  
IP66 rated



## QuickShip Ordering Information


Part #
LL-GCLP-30-50-UNV-WH
LL-GCLP-30-40-UNV-WH
LL-GCLP-45-50-UNV-WH
LL-GCLP-45-40-UNV-WH
LL-GCLP-65-50-UNV-WH
LL-GCLP-65-40-UNV-WH
LL-GCLP-90-50-UNV-WH
LL-GCLP-90-40-UNV-WH




### Dimension

Item	Diameter	Height
30W Canopy w/o Motion Sensor	12"	3.32"
45W Canopy w/o Motion Sensor	12"	3.32"
65W Canopy w/o Motion Sensor	12"	3.32"
90W Canopy w/o Motion Sensor	13.03"	3.15"
28W Canopy with Motion Sensor	12"	4.21"
42W Canopy with Motion Sensor	12"	4.21"
65W Canopy with Motion Sensor	12"	4.21"
90W Canopy with Motion Sensor	13.03"	4.29"

#### No Motion Sensor



#### With Motion Sensor




### Mounting


Suitable for J-BOX mounting and easy installation. Also supports pendant mounting with wires coming out from the back for easier wire connections.

### Photometrics

#### General



#### Parking Garage

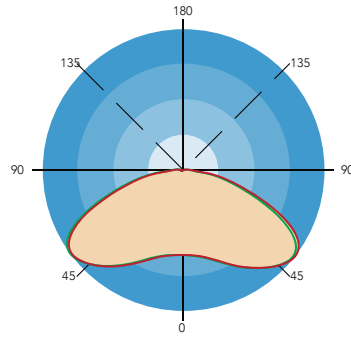



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

## Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Distribution	Custom Option Available*
LL-GCLP-30-50-UNV-WH	30	3800	5000	120-277	Type V	Yes
LL-GCLP-30-40-UNV-WH	30	3800	4000	120-277	Type V	Yes
LL-GCLP-45-50-UNV-WH	45	5500	5000	120-277	Type V	Yes
LL-GCLP-45-40-UNV-WH	45	5500	4000	120-277	Type V	Yes
LL-GCLP-65-50-UNV-WH	65	7600	5000	120-277	Type V	Yes
LL-GCLP-65-40-UNV-WH	65	7600	4000	120-277	Type V	Yes
LL-GCLP-90-50-UNV-WH	90	11600	5000	120-277	Type V	Yes
LL-GCLP-90-40-UNV-WH	90	11400	4000	120-277	Type V	Yes

\* Please contact LITELUME for all Custom Option Requests

## QuickShip Ordering Information

Part #
LL-GCLP-30-50-UNV-WH
LL-GCLP-30-40-UNV-WH
LL-GCLP-45-50-UNV-WH
LL-GCLP-45-40-UNV-WH
LL-GCLP-65-50-UNV-WH
LL-GCLP-65-40-UNV-WH
LL-GCLP-90-50-UNV-WH
LL-GCLP-90-40-UNV-WH

## Mounting Ordering Information

Part #	Description
MS20	Bi-Level Pir Motion Sensor 20
LL-100	Remote Control 100
L3	L3 Low Bay Coverage Lens
L4	L4 High Bay Coverage Lens
C-EM-R-WH	Remote Emergency Battery Back-Up Kit For Canopy 8W White
SUB "UNV" WITH "480"	480 Volt *45W & 60W Only*

\* Please contact LITELUME for all Custom Option Requests

## Buy American Act Compliant Ordering Information

Part #	Description
BAA-GCLP	Buy American Act Compliant for Garage Canopy Low Profile

\* Please contact LITELUME for all Custom Option Requests