



Stairwell Luminaire



Description

The LITELUME™ LED Stairwell Luminaire (LL-SW) is a surface mounted luminaire specifically optimized for use in stairwells, corridors & hallways. Designed for retrofit or new construction, with vandal resistant housing. Equipped with an integrated pir sensor and multiple emergency battery backup options. Featuring 3 level lumen output and 3 color adjustable CCT, allowing for customized energy savings and comfortability.

Fixture Information

Size:	35W/45W/55W
Housing:	Aluminum
Lens:	Frosted PC
Colors:	Standard: White
Mountings:	Standard: Wall Mount
Accessories:	Emergency Back-up Battery
Sensors	Standard: 0-10v PIR sensor
Dimming:	Standard: 0-10v continuous, 12Vdc
Operating temperature:	-40° F to 104° F
Power factor:	.90
CRI:	83
Voltage:	Standard: 120-277V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

4,200 to 6,600 lm

Lumens Per Watt (typical):

120 lm/W

CCT:

3500K
4000K
5000K

Lifespan:

Up to 100,000 running hours

Ratings & Certificates


UL Listed for Damp Locations







Dimension

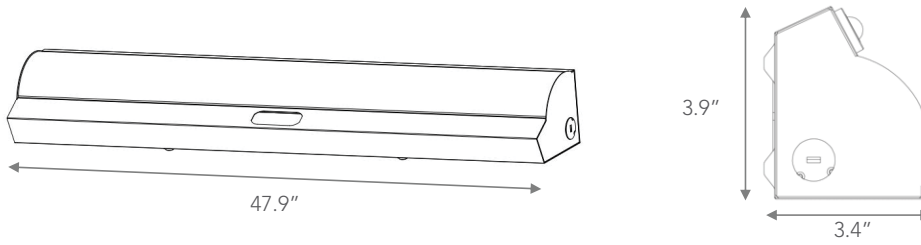
Item	Length	Height	Width	Weight
LL-SW	47.9"	3.9"	3.4"	4.85 lbs



Control

ANT-15	RC-100
	
PIR sensor	Remote Control


Emergency Back-up



EM8 - Emergency Battery Back Up, 8W, 90 min
 EM15 - Emergency Battery Back Up, 15W, 90 min
 EM20 - Emergency Battery Back Up, 20W, 90 min


Photometrics

55W - 3500K

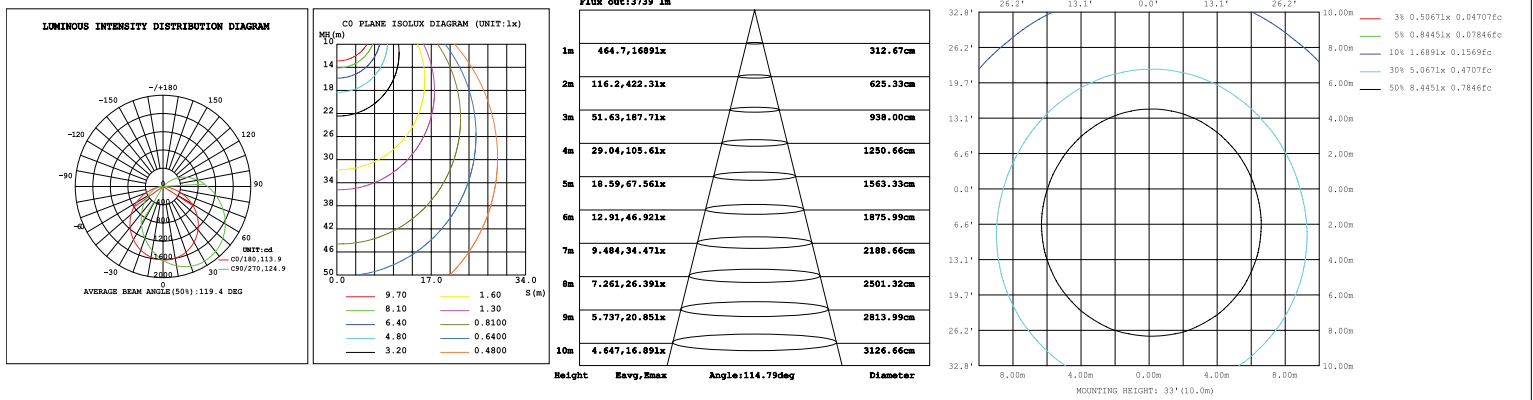




55W - 4000K

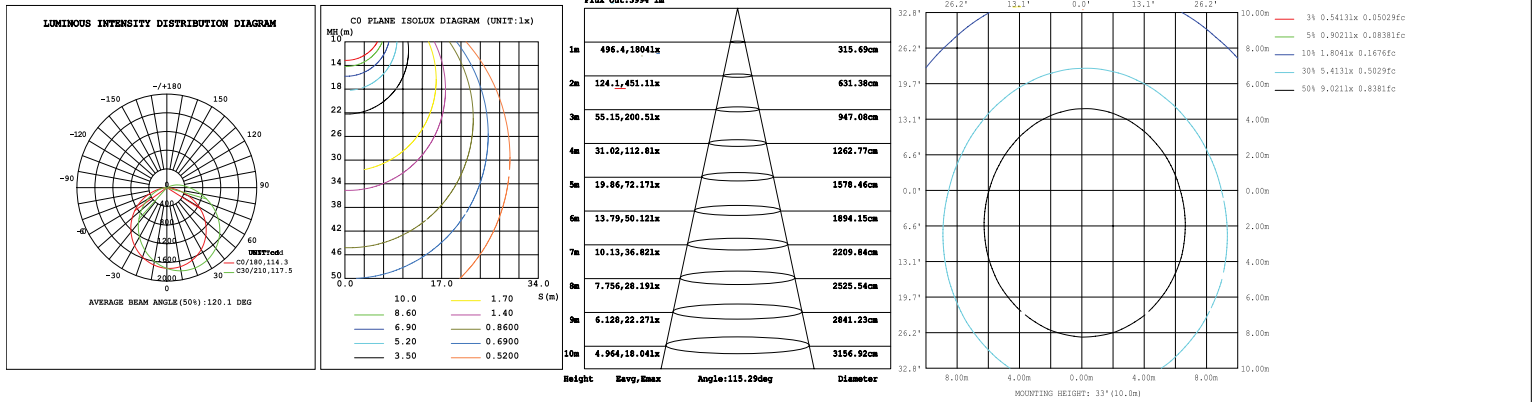

55W - 5000K

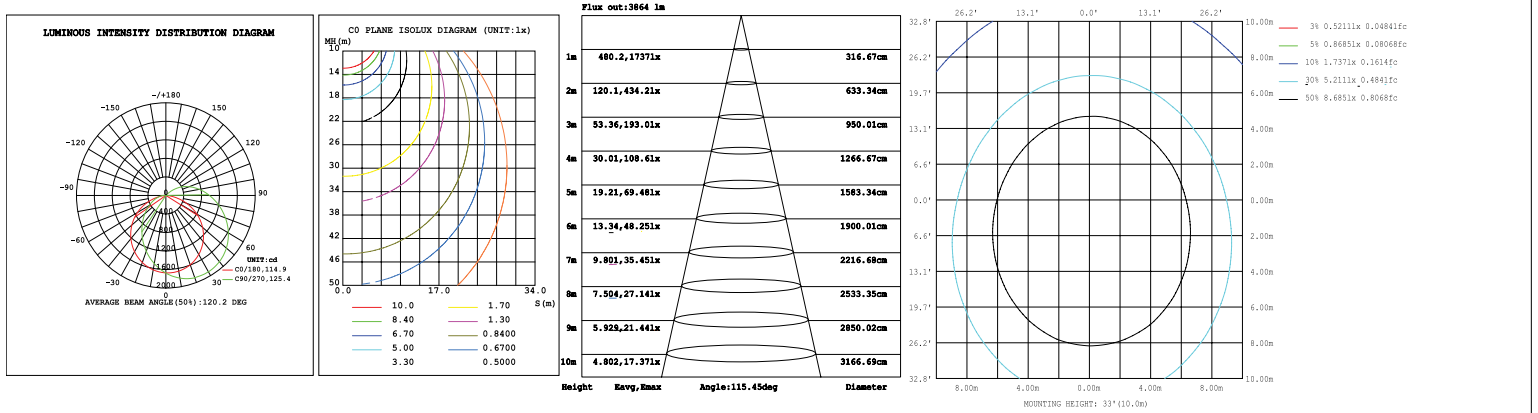



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-SW-[35][45][55]-3CCT-UNV	35W 45W 55W	4200/5400/6600	3500K/4000K/5000K	120-277

Accessories Ordering Information

Part #	Description
RC100	Remote Control 100
EM8	Emergency Battery Back Up, 8W, 90 min
EM15	Emergency Battery Back Up, 15W, 90 min
EM20	Emergency Battery Back Up, 20W, 90 min

* Please contact LITELUME for all Custom Option Requests