



Standard Model



Emergency Battery Back Up  
High Frequency Sensor Bi-Level  
Emergency Battery Back Up / High Frequency Sensor Bi-Level

## Description

The LITELUME™ Ceiling Now (LL-CN) luminaire incorporates built-in emergency lighting, sensed bi-level lighting or both in this multi-functional design. Features a die-formed cold rolled steel housing in satin nickel or oil rubbed bronze with a high transmission acrylic lens for a soft appearance. Offering 4 different sizes and wattages. Available in 3000k, high power factor and low THD.

Applications: commercial, residential, hospitality and entertainment.

## Fixture Information

Size:	18W/23W/28W/35W
Housing:	Die-formed cold rolled steel
Finish:	Protective powder coat
Color:	Standard: Satin Nickel (SN) Standard: Oil Rubbed Bronze (ORB)
Mounting:	Standard: Ceiling Mount
Lens:	High Transmission Acrylic
CRI:	80
Power Factor:	.90
Voltage:	Standard: 120V, 120-277V
Warranty:	10-Year Limited Warranty

## Performance Data

### Lumen Output:

1430 to 3364 lm

### Lumens Per Watt (typical):

72 to 98 lm/W

### CCT:

3000K

## Ratings & Certificates

ETL/cETL Listed  
Damp Location Listed





## Dimension

(Emergency Battery Back Up)

(High Frequency Sensor Bi-Level)


(Emergency Battery Back Up / High Frequency Sensor Bi-Level)

Item	Diameter (a)	Height (b)
18W	11.8"	5.0"
23W	14.6"	5.7"
28W	16.0"	5.9"
35W	17.7"	5.9"

## Dimension

(Standard Model)

Item	Diameter (a)	Height (b)
18W	11.8"	4.2"
23W	14.6"	4.6"
28W	16.0"	4.9"
35W	17.7"	4.9"

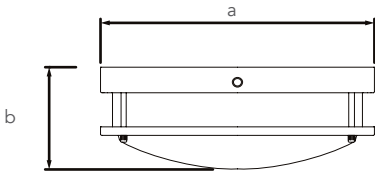



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

## Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-CN-18-30-120-SN	18	1430	3000	120	Satin Nickel
LL-CN-18-30-120-ORB	18	1430	3000	120	Oil Rubbed Bronze
LL-CN-23-30-UNV-SN	23	2267	3000	120-277	Satin Nickel
LL-CN-23-30-UNV-ORB	23	2267	3000	120-277	Oil Rubbed Bronze
LL-CN-28-30-UNV-SN	28	2600	3000	120-277	Satin Nickel
LL-CN-28-30-UNV-ORB	28	2600	3000	120-277	Oil Rubbed Bronze
LL-CN-35-30-UNV-SN	35	3364	3000	120-277	Satin Nickel
LL-CN-35-30-UNV-ORB	35	3364	3000	120-277	Oil Rubbed Bronze

## Emergency Battery Back Up

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-CN-EM4-18-30-120-SN	18	1430	3000	120	Satin Nickel
LL-CN-EM4-18-30-120-ORB	18	1430	3000	120	Oil Rubbed Bronze
LL-CN-EM8-18-30-120-SN	18	1430	3000	120	Satin Nickel
LL-CN-EM8-18-30-120-ORB	18	1430	3000	120	Oil Rubbed Bronze
LL-CN-EM8-23-30-UNV-SN	23	2267	3000	120-277	Satin Nickel
LL-CN-EM8-23-30-UNV-ORB	23	2267	3000	120-277	Oil Rubbed Bronze
LL-CN-EM8-28-30-UNV-SN	28	2600	3000	120-277	Satin Nickel
LL-CN-EM8-28-30-UNV-ORB	28	2600	3000	120-277	Oil Rubbed Bronze
LL-CN-EM8-35-30-UNV-SN	35	3364	3000	120-277	Satin Nickel
LL-CN-EM8-35-30-UNV-ORB	35	3364	3000	120-277	Oil Rubbed Bronze

## Emergency Battery Back Up/ High Frequency Sensor Bi-Level

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-CN-EM4-BI-18-30-120-SN	18	1430	3000	120	Satin Nickel
LL-CN-EM4-BI-18-30-120-ORB	18	1430	3000	120	Oil Rubbed Bronze
LL-CN-EM8-BI-18-30-120-SN	18	1430	3000	120	Satin Nickel
LL-CN-EM8-BI-18-30-120-ORB	18	1430	3000	120	Oil Rubbed Bronze
LL-CN-EM8-BI-23-30-UNV-SN	23	2267	3000	120-277	Satin Nickel
LL-CN-EM8-BI-23-30-UNV-ORB	23	2267	3000	120-277	Oil Rubbed Bronze
LL-CN-EM8-BI-28-30-UNV-SN	28	2600	3000	120-277	Satin Nickel
LL-CN-EM8-BI-28-30-UNV-ORB	28	2600	3000	120-277	Oil Rubbed Bronze
LL-CN-EM8-BI-35-30-UNV-SN	35	3364	3000	120-277	Satin Nickel
LL-CN-EM8-BI-35-30-UNV-ORB	35	3364	3000	120-277	Oil Rubbed Bronze



## Emergency Battery Back Up / High Frequency Sensor Bi-Level

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-CN-EM-BI-18-30-120-SN	18	1430	3000	120	Satin Nickel
LL-CN-EM-BI-18-30-120-ORB	18	1430	3000	120	Oil Rubbed Bronze
LL-CN-EM-BI-23-30-UNV-SN	23	2267	3000	120-277	Satin Nickel
LL-CN-EM-BI-23-30-UNV-ORB	23	2267	3000	120-277	Oil Rubbed Bronze
LL-CN-EM-BI-28-30-UNV-SN	28	2600	3000	120-277	Satin Nickel
LL-CN-EM-BI-28-30-UNV-ORB	28	2600	3000	120-277	Oil Rubbed Bronze
LL-CN-EM-BI-35-30-UNV-SN	35	3364	3000	120-277	Satin Nickel
LL-CN-EM-BI-35-30-UNV-ORB	35	3364	3000	120-277	Oil Rubbed Bronze