



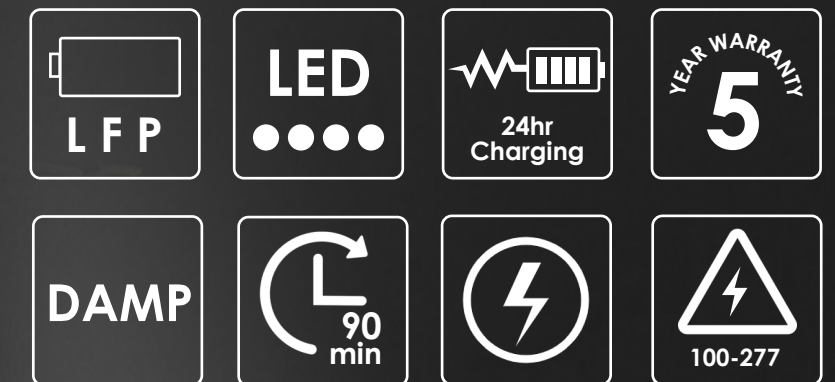

STREAMER
The Emergency Lighting Expert

LED Emergency Driver

Dynavion Series

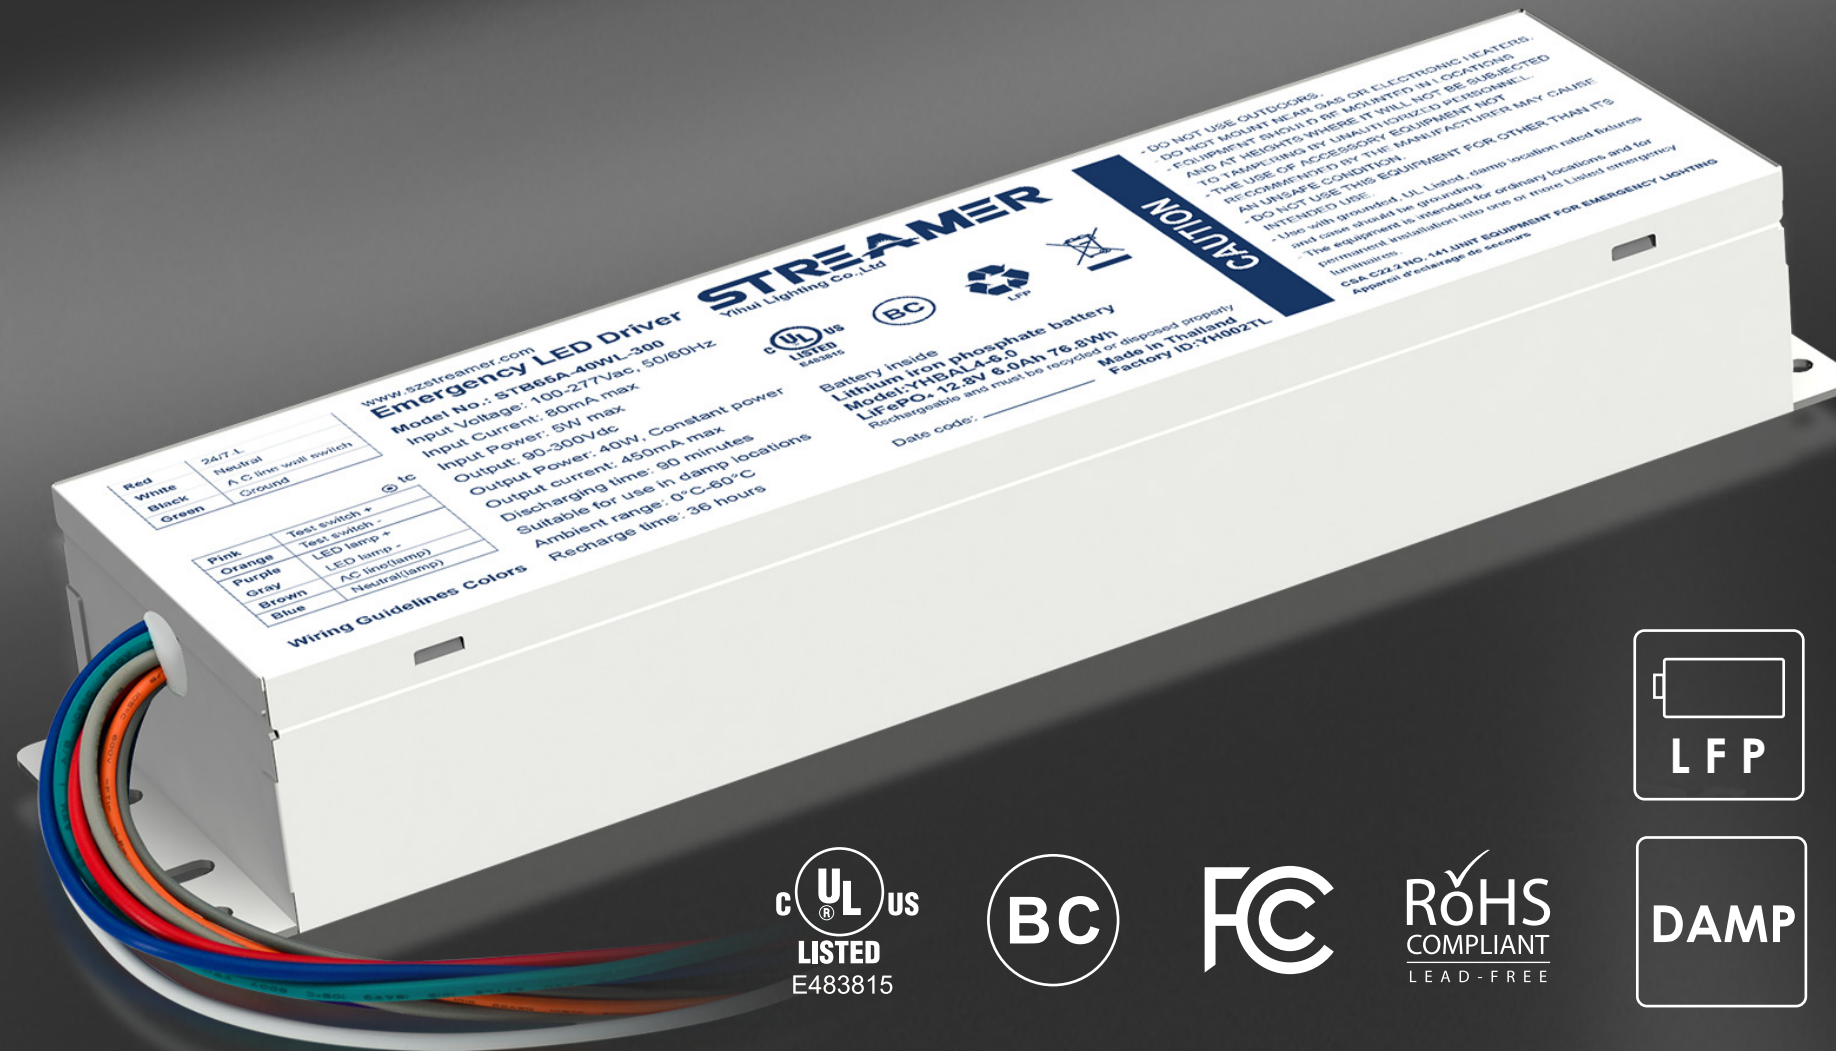

Engineered to convert standard LED luminaires into reliable emergency lighting—ideal for most linear highbay applications and other commercial fixtures. Pre-wired with conduit for fast, secure installation.



Ordering Data

STB65A-40WL-300

Size: 10"(254mm)×2 3/5"(68.5mm)×1 1/2"(37.5mm)



Dynavion 40 LED Emergency Driver

Engineered to convert standard LED luminaires into reliable emergency lighting solutions—without compromising architectural aesthetics.

- **Compact Form Factor:** Designed for constrained spaces.
- **Code-Compliant & Certified:** UL Classified for both factory and field installation to ensure regulatory compliance and ease of integration.
- **Flexible Deployment:** Supports both pre-installed and on-site retrofit scenarios, enabling seamless project execution.
- **High-Performance Battery:** Features a maintenance-free, high-capacity LiFePO4 battery designed for extended life and reliability.
- **90-Minute Emergency Runtime:** Delivers consistent emergency illumination for a minimum of 90 minutes in accordance with safety standards.
- **Rest Mode Functionality:** Built-in rest mode preserves battery integrity during extended storage or delayed commissioning.



Standard Accessory



Code : 31181501
PJ-SWINDR-003
Wire: 5 ⁹/₁₀" (150mm)

Optional Accessory



Code : 29000006
PJ-SWINDR-009
Wire: 5 ⁹/₁₀" (150mm)

Perofrmance Data



Model No.: STB65A-40WL-300

Rated input Power 5W max


Input Current 80mA max

Rated Input 100-277Vac,50/60Hz


Rated Output DC90-300V 40W c.p

Battery Pack LiFePO₄ 12.8V 6.0Ah 76.8Wh

Discharge Time >90 minutes

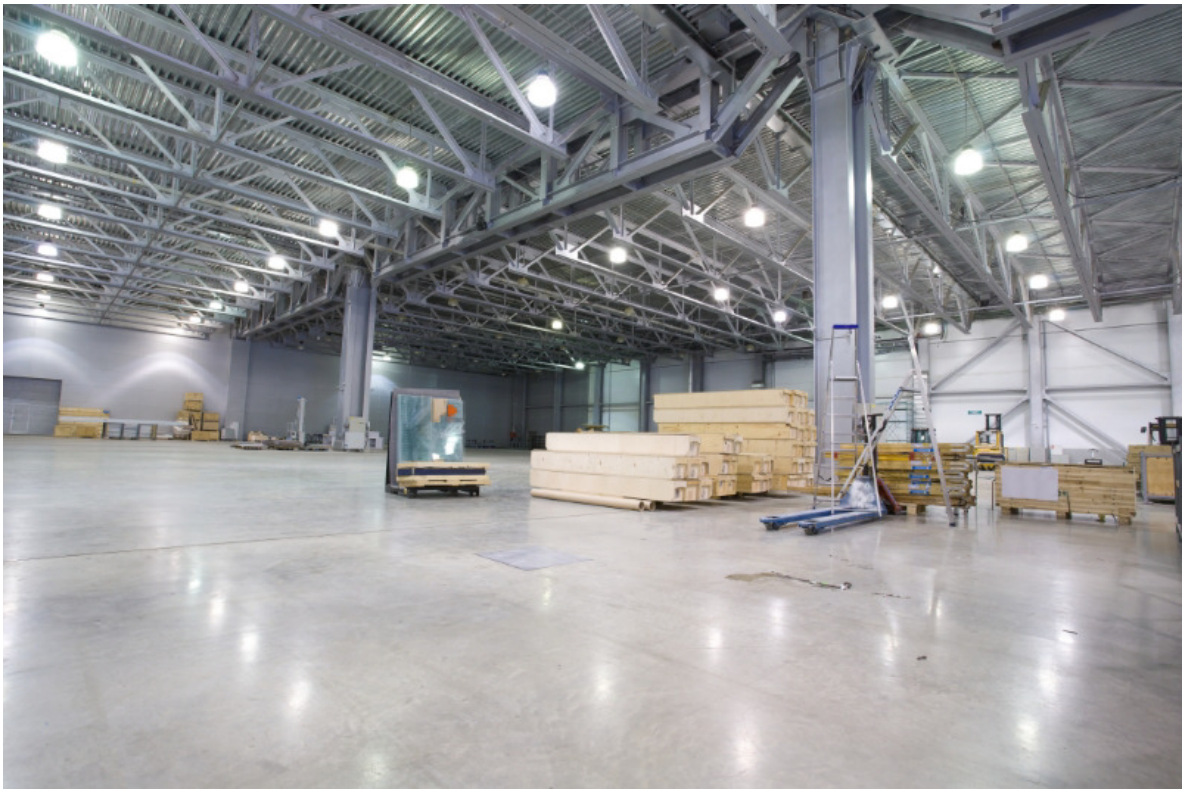

Warehouse

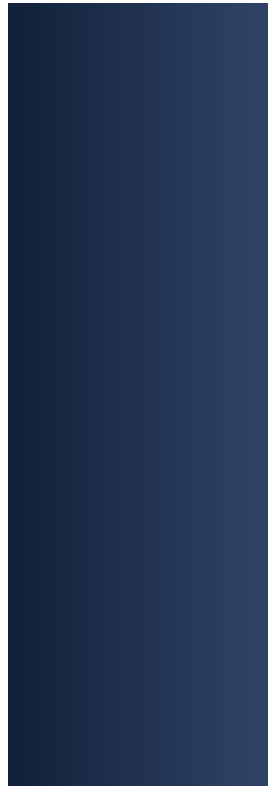

STREAMER

The Emergency Lighting Expert

☎ +86 187 5825 5735

✉ sales@streamerus.com

📍 Building 35, CIMC Zhigu Industrial Park, Lilin Town,
Zhongkai High-tech Zone, Huizhou, China

