

# Wrap Around Premium





\*Not all product variations listed on this page are DLC qualified. Visit www.designlights.org/search to confirm qualification



#### **Description**

The Litelume LED Wrap Around Premium (LL-WAPR) is a ceiling mounted luminaire designed for retrofit or new construction. This fixture adopts the latest in optical and LED technology providing an evenly pleasant illuminance. Featuring 3 level lumen output and 3 color adjustable CCT, allowing for customized energy savings and comfortability. High Power factor .90 and low THD.

## **Fixture Information**

Size: 30W/35W/40W
Color: Standard: White
Mounting: Standard: Ceiling
Operating Temperature: -4°F to 122°F

Power Factor: >.98 CRI: 80

Dimmable: Standard: 0-10v continuous, can dim

down to 10%

Voltage: Standard: 120-277V
Warranty: 10-Year Limited Warranty

## **Performance Data**

### **Lumen Output:**

4,110 to 5,240 lm

## Lumens Per Watt (typical):

130 lm/W

**CCT:** 3500K 4000K 5000K

#### Lifespan:

Features SMD 2835 LED's with up to 100,000 running hours

#### **Ratings & Certificates**

UL Listed For Damp Location DLC Premium Listed










## **Dimension**

Item	Length	Width	Depth	Weight
Wrap Around Premium	47.7"	7.1"	2.8"	7.94 lbs




## **Photometrics**

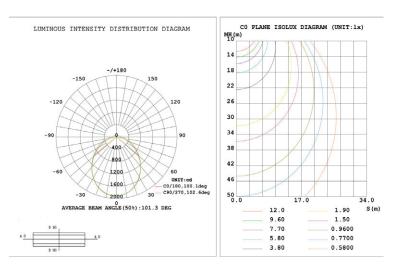



#### **Control Module**

The Litelume LED Wrap Around Premium can adjust the power and color temperature of the whole lamp conveniently and fast to the customer's needs.

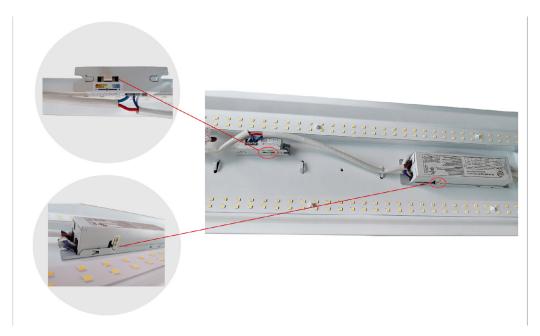



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

## **Fixture Ordering Information**

Part #	Wattage	Lumens	Kelvin	Voltage
LL-WAPR-[30][35][40]-3CCT-UNV	30W 35W 40W	4110/4690/5240	3500K 4000K 5000K	120-277

<sup>\*</sup> Please contact LITELUME for all Custom Option Requests

## **Accessories Ordering Information**

Part #	Description
BRI810-C-F	Sharkward 120/277V 0-10V Microwave Motion Sensor
RC100	Remote Control 100
AC-MWS105E-FA102	Autani Compatible - Keilton MWS105E Integrated 12V Eco Microwave Sensor & FA102 Integrated Fixture Adapter LLLC
EM8	Emergency Battery Backup, 8W, 90 minuutes

<sup>\*</sup> Please contact LITELUME for all Custom Option Requests