




Exit Explosion Proof All Purpose

LL-EXEPAP

Exit Explosion Proof All Purpose

The LITELUMETM Exit Explosion Proof All Purpose (LL-EXEPAP) Class 1, Division 1 is built from A356-T6 Aluminum, stainless steel fasteners and tempered glass, with edge lit exit sign.

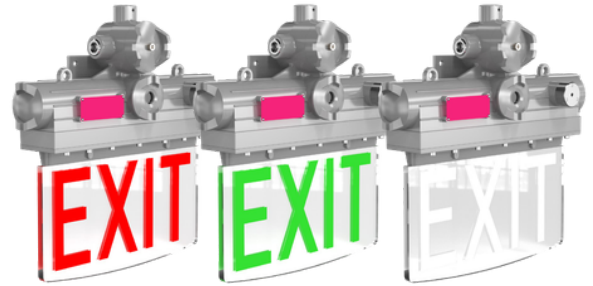

BENEFITS & FEATURES

- 3 Hour Emergency Operation
- Alternate Exit Legend and Languages Available
- Low Energy Consumption
- Provided with 3/4" NPT or M25 Conduit Hubs
- Long Lifespan up to 50,000 Hours
- Edge Lit Sign
- Ingress Protection Rating IP66

RATINGS & CERTIFICATES

IP66 • IK08 • UL924 • ETL
CSA NO.213, C22.2 No.137-18
Class I, Division 1, Groups B, C, D
Class I, Division 2, Groups A, B, C, D
Class 2, Division 1, Groups E, F, G
Class 2, Division 2, Groups E, F, G

APPLICATIONS

Oil/Gas • Painting Facilities • Manufacturing
Marine/Hazardous/Industrial • Auto Service

FIXTURE INFORMATION


Size	Housing	Finish	Hardware	Letters	Exit Sign Plate
3W - 5W	A356-T6 Aluminum	Baked-On Epoxy	Stainless Steel	Red or Green	Tempered Glass
Voltage	Operating Temperature	Emergency Time	Mounting		Warranty
120-277V	-10°C to 60°C (14°F - + 140°F)	3 Hours	• Standard: Wall Mount • Optional: Pendant Mount (See Accessories) • Suspended Mount (By Others)		7 Years 3 Years on Battery



Exit Explosion Proof All Purpose


EXPLANATION OF INDICATOR LIGHT

LED Features		Green LED	Red LED	Yellow LED
Operate Mode				
Charge Mode	Charging	OFF	ON	OFF
	Fully Charged	ON	OFF	OFF
Discharge Mode	Discharge	OFF	OFF	OFF
	Discharge Cutoff	OFF	OFF	OFF
Battery Under Voltage		OFF	OFF	ON
Battery Over Voltage		OFF	OFF	




DESCRIPTION OF SWITCH

Working Mode	Magnetic Switch Operation	Function
AC Mains Mode	The magnet head is close to the magnetic switch for 1 second	Enter emergency mode once under mains power to check whether the emergency function is normal
Emergency Mode	The magnet head is close to the magnetic switch for 3 seconds	In emergency mode, turn off the emergency output



DIMENSIONS

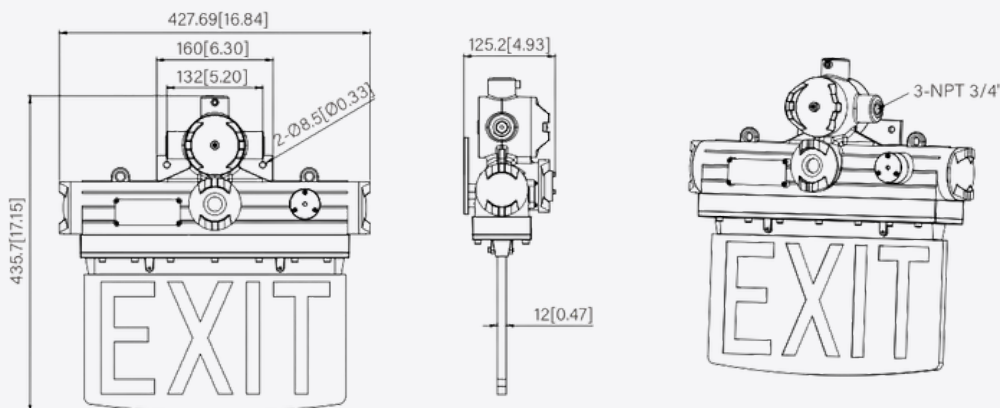





Exit Explosion Proof All Purpose

MOUNTING


Wall Mount

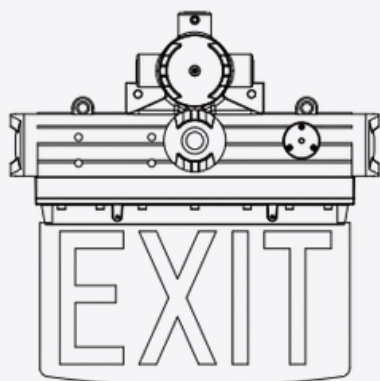

Pendant Mount

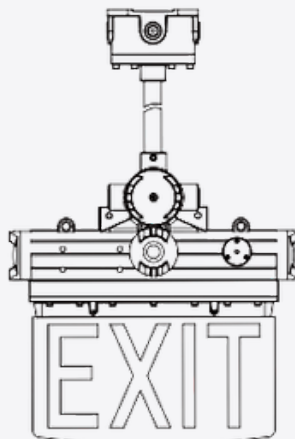

Suspended Mount

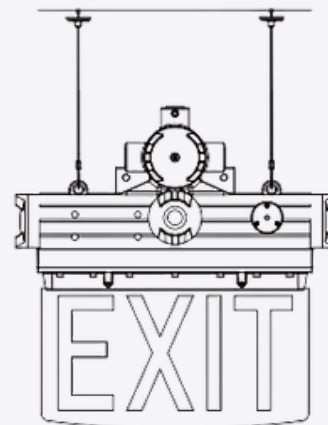

PACKING INFORMATION

Net Weight

9.1 kg / 20.06 lb

Gross Weight

11.0 kg / 24.25 lb

Packing Size

555 × 540 × 185 mm / 21.85 × 21.26 × 7.28 inch

Quantity/Carton

1 Pcs

ACCESSORIES

JB - Junction Box



PM12 - 12" Pendant





Exit Explosion Proof All Purpose

PROJECT NAME	
CATALOG #	
JOB TYPE	
PREPARED BY	
NOTES	

ORDERING GUIDE

Brand	Fixture Type		Power
LL LITELUME	EXEPAP Exit Explosion Proof All Purpose		3 3W 5 5W
Letters	Voltage	Color	Accessories
R Red G Green	UNV 120-277V	GY Gray	JB Junction Box PM12 12" Pendant

FIXTURE ORDERING INFORMATION

Part #	Watts	Letters	Voltage
LL-EXEPAP-3-R-UNV-GY	3	Red	120-277V
LL-EXEPAP-5-G-UNV-GY	5	Green	120-277V

ACCESSORIES ORDERING INFORMATION

Part #	Description
JB	Junction Box
PM12	12" Pendant