



LED Strip Linear Premium Series



Description

The LITELUME Strip Linear Premium Series (LL-SLPR) features a rigid design with rounded corners pleasing to the eye making it suitable for many applications. The multi-functional channel comes in 4' and 8' lengths and 5 different wattages with 0-10v dimming drivers standard to satisfy a variety of purposes. Secondary controls, sensors and emergency battery backup is available in addition to multiple mounting options. An Excellent choice for grocery, retail, warehouse, shop, storage, utility, coves, and any general lighting

Fixture Information

Size:	23W/35W/45W/46W/65W
Housing:	Aluminum
Finish:	Protective powdercoat
Color:	Standard: White
Mounting:	Standard: Surface Mount Suspended Mount
Lens:	Frosted Diffuser
Accessories:	Remote Control Emergency Back-up Battery (8W) Cords Plugs Sensors
Operating Temperature:	-40° F to 131° F
Power Factor:	.95
CRI:	80
Voltage:	Standard: 120-277V Custom Option: 347-480V
Sensor:	Standard: No sensor Bi-Level PIR motion sensor
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

3,000 to 8,750 lm

Lumens Per Watt (typical):

126 to 134 lm/W

CCT:

4000K
5000K

Lifespan:

Up to 100,000 running hours

Ratings & Certificates

UL Listed
Damp Location Listed







Dimension

Item	Length	Height	Depth	Weight
Strip Linear Premium Series 4ft - 23W/35W	48.00"	3.76"	2.88"	5.75 lbs
Strip Linear Premium Series 4ft - 45W	48.00"	3.76"	2.88"	5.88 lbs
Strip Linear Premium Series 8ft - 46W/65W	95.94"	3.76"	2.88"	11.28 lbs

4ft

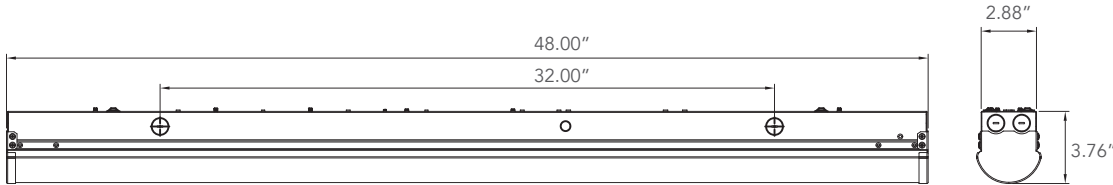


8ft

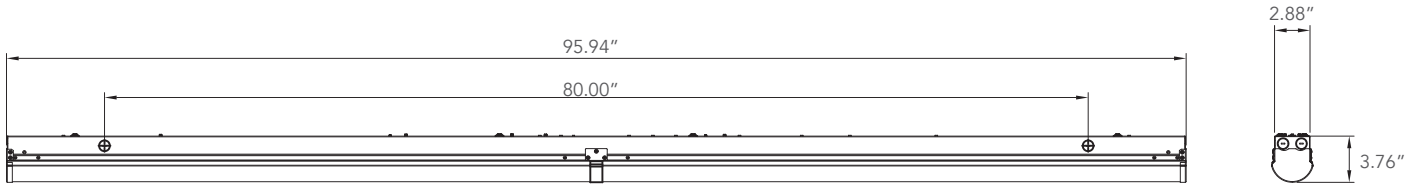

Photometrics

General





Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-SLPR-4-23-50-UNV-WH	23	3050	5000	120-277
LL-SLPR-4-23-40-UNV-WH	23	3000	4000	120-277
LL-SLPR-4-35-50-UNV-WH	35	4700	5000	120-277
LL-SLPR-4-35-40-UNV-WH	35	4650	4000	120-277
LL-SLPR-4-45-50-UNV-WH	45	6050	5000	120-277
LL-SLPR-4-45-40-UNV-WH	45	6000	4000	120-277
LL-SLPR-8-46-50-UNV-WH	46	6100	5000	120-277
LL-SLPR-8-46-40-UNV-WH	46	6050	4000	120-277
LL-SLPR-8-65-50-UNV-WH	65	8750	5000	120-277
LL-SLPR-8-65-40-UNV-WH	65	8700	4000	120-277

* Please contact LITELUME for all Custom Option Requests

Accessories Ordering Information

Part #	Wattage
MS33	Bi-Level PIR Motion Sensor 33 (*Must Select Lens Coverage Below*)
L1	L1 Low Bay Coverage Lens
L2	L2 High Bay Coverage Lens
LL-100	Remote Control 100
FSIR100	Wattstopper FSIR-100 Wireless Configuration Tool for FSP-211/HBP-111
MC031V-D	Merrytek IP65 Rated Microwave Motion Sensor
HBP111	Wattstopper HBP-111 High/Low Bay PIR Motion Sensor With IR Remote Capabilities
EM8	Emergency Battery Back Up 8W
SUB "UNV" WITH "480"	480 Volt

* Please contact LITELUME for all Custom Option Requests

Buy American Act Compliant Ordering Information

Part #	Description
BAA-SLPR	Buy American Act Compliant For Strip Linear Premium Series

* Please contact LITELUME for all Custom Option Requests