



Description

All LED Running Man Sign & Emergency Lightpipe Thermoplastic Combo

Illumination:

- Ultra bright, energy efficient white LED emergency lighting.
- 4.5 watt (36 LEDs x 0.125 watts) per light pipe.
- Adjustable high performance, smooth, chrome-plated, metalized reflector and acrylic, UV-stabilized "light pipe" lens for optimal light distribution.
- Ultra bright, energy efficient, long lasting white LED provides even, fully illuminated panel.

Electrical:

- Dual 120V/277 voltage,
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V Long life, maintenance-free, rechargeable NiCd battery.
- Remote capacity of 3.0 watts standard.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.
- Field selectable, universal directional indication provided with three (Right, Left and No Arrow) pictogram legends.

Housing:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

Options:


- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.

Warranty/Listing:

- Seven year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- CSA listed for damp locations (0°C – 50°C).
- Meets or exceeds CSA C22.2 No. 141.15 standard requirements for Emergency lighting equipment.



Dimensions:

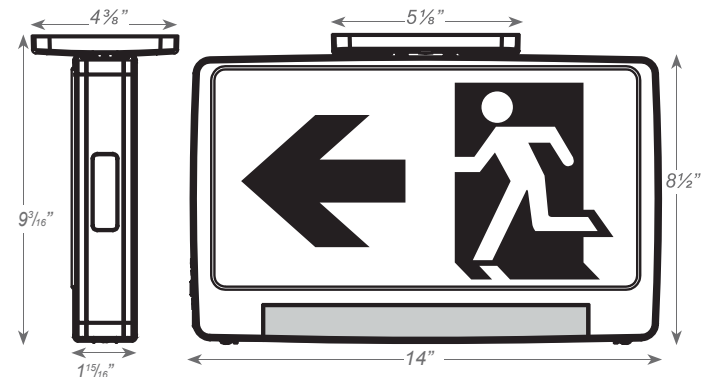



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Model	No. of Faces		Letter Color		Options	
LL-RMCLPU	2	Universal Single/ Double Face	R G	Red Green	RC SDT	Remote Capacity (standard) Self-Diagnostic