



Description

Remote Capable Compact Thermoplastic Exit Sign

Illumination:

- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

Electrical:

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- 3.0W of remote capacity standard
- Internal solid-state transfer switch automatically connects the internal battery to LED board and connected LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- EZ-snap thermoplastic mounting canopy included – provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

Housing:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.

Options:

- SPV: UL Listed for special voltage option.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.

Warranty/Listing:


- Seven year warranty on all electronics and housing. Battery prorated for five years.
- UL Listed for damp locations (0°C – 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.



LISTED



Dimensions:

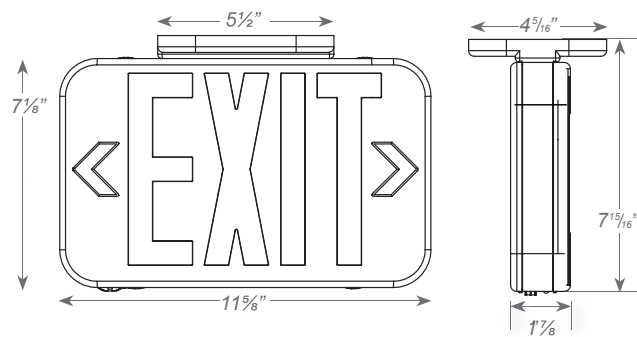



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Model	No. of Faces		Letter Color		Housing Color		Options	
LL-CEXTEU	3	Universal Single/ Double Face	R G RG	Red Green Red/Green	W B	White Black	SDT SPV	Self-Diagnostics ¹ 120/230 Volt 50/60Hz ¹

¹ Not available with RG units.

Electrical Information

Catalog Number	Input Watts (W)			Input Amps (A)		
	120V	230V	277V	120V	230V	277V
LL- CEXTEU RG	1.2	N/A	1.2	0.12	N/A	0.12
LL- CEXTEU Red/Green	1.2	1.2	1.2	0.12	0.12	0.12
LL- CEXTEU Red SDT	3.0	3.0	3.0	0.05	0.05	0.05
LL- CEXTEU Green SDT	2.7	2.7	2.7	0.05	0.05	0.05