




# Wallpack Medium Full Cutoff



\*Not all product variations listed on this page are DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification

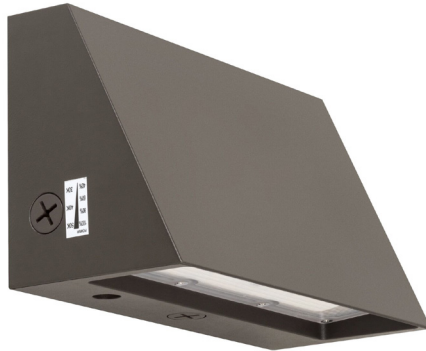

## Description

The LITELUME™ Wallpack Medium – Full Cutoff (LL-WPMFC) is a Dark Sky compliant LED fixture with a durable polycarbonate optical lens.

Applications: Entryways, Pathway, Perimeter and Security lighting.

## Fixture Information

Size:	12W/18W/24W/30W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Grey (GY)
Mounting:	Standard: Wall Mount
Lens:	Polycarbonate
Voltage:	Standard: 120-277V, 277-480V
Dimmable:	Standard: 0-10v continuous, 12Vdc auxiliary dimming
Power Factor:	.90
CRI:	80
Operating Temperature:	-22°F to 113°F
Sensor:	Standard: (120-277) Photocell & Plug Standard: (277-480V) No Photocell
Warranty:	10-Year Limited Warranty

## Performance Data

### Lumen Output:

1,675 to 3,779 lm

### Lumens Per Watt (typical):

132-142 lm/W

### CCT:

3000K  
4000K  
5000K

### Distribution:

Wide

### Lifespan:

Up to 100,000 running hours

## Ratings & Certificates


UL Listed For Wet Location  
Dark Sky Compliant  
DLC Premium Listed  
Title 24 Compliant






### Dimension

Item	Width	Depth	Height	Weight
Wallpack Medium Full Cutoff	9.91"	4.37"	5.8"	4.28 lb

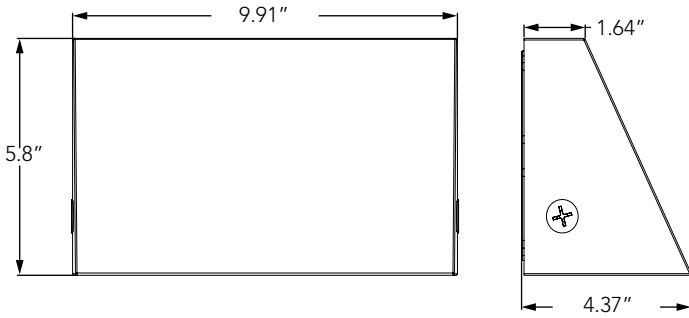


### Photometrics

12W, 4000K

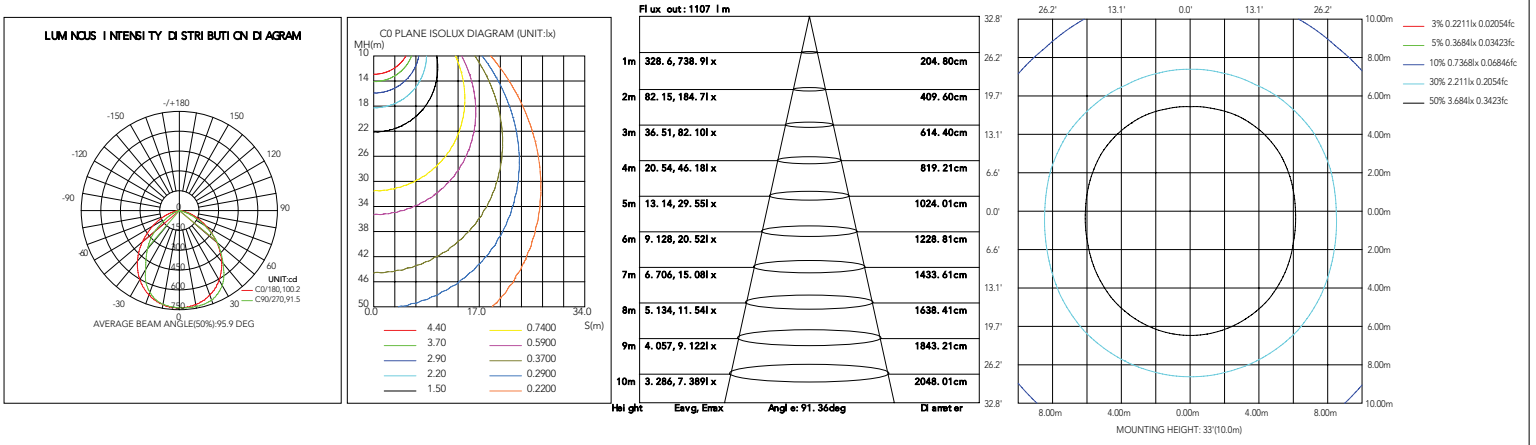


18W, 4000K

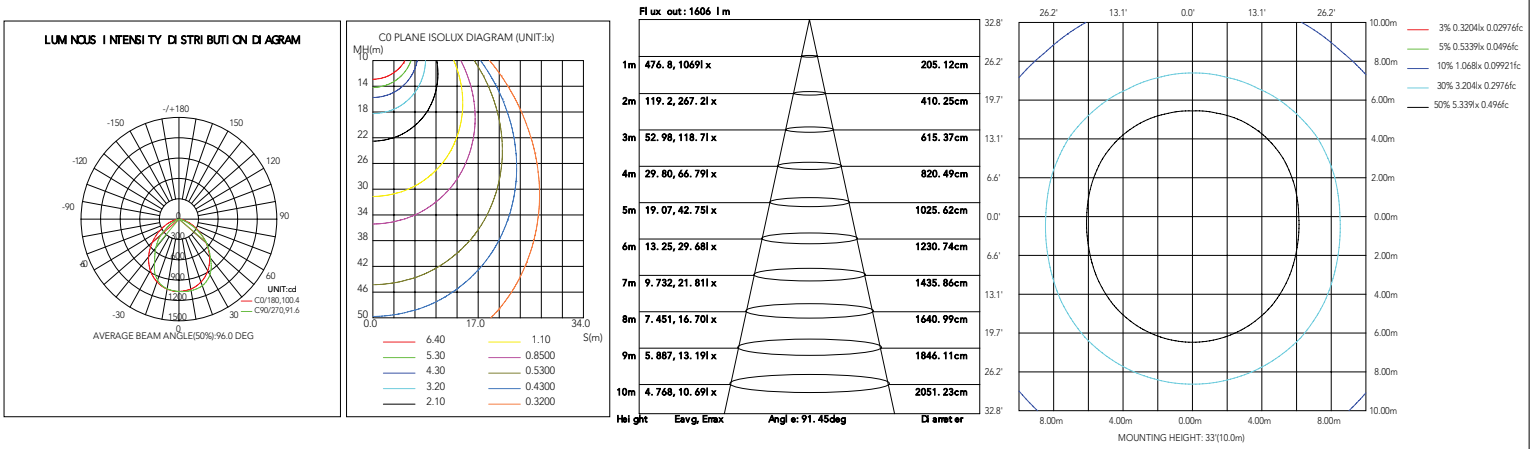




24W, 4000K

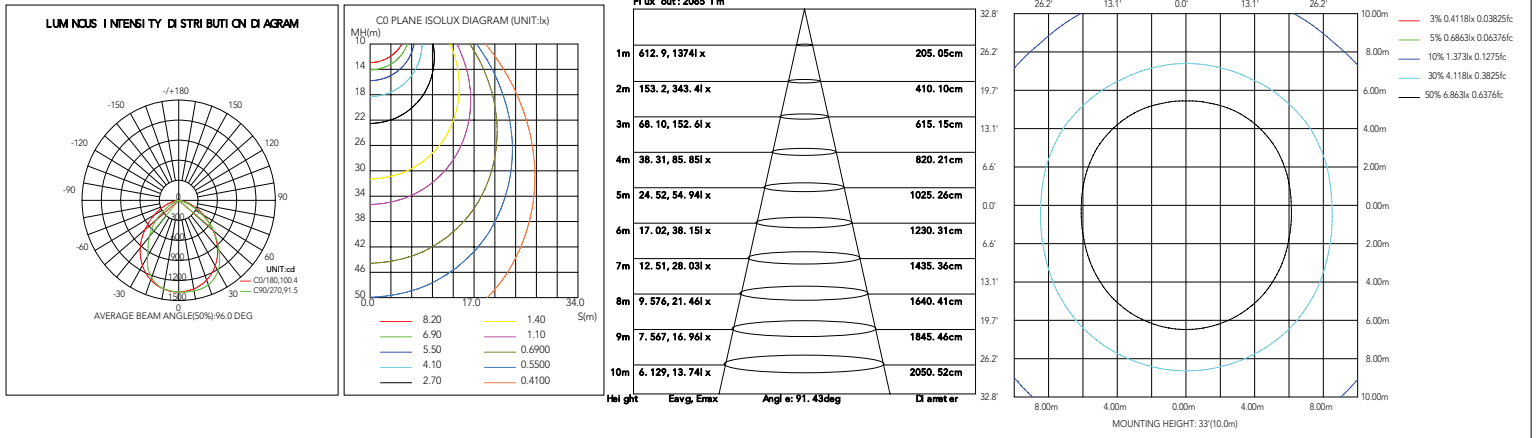

30W, 4000K

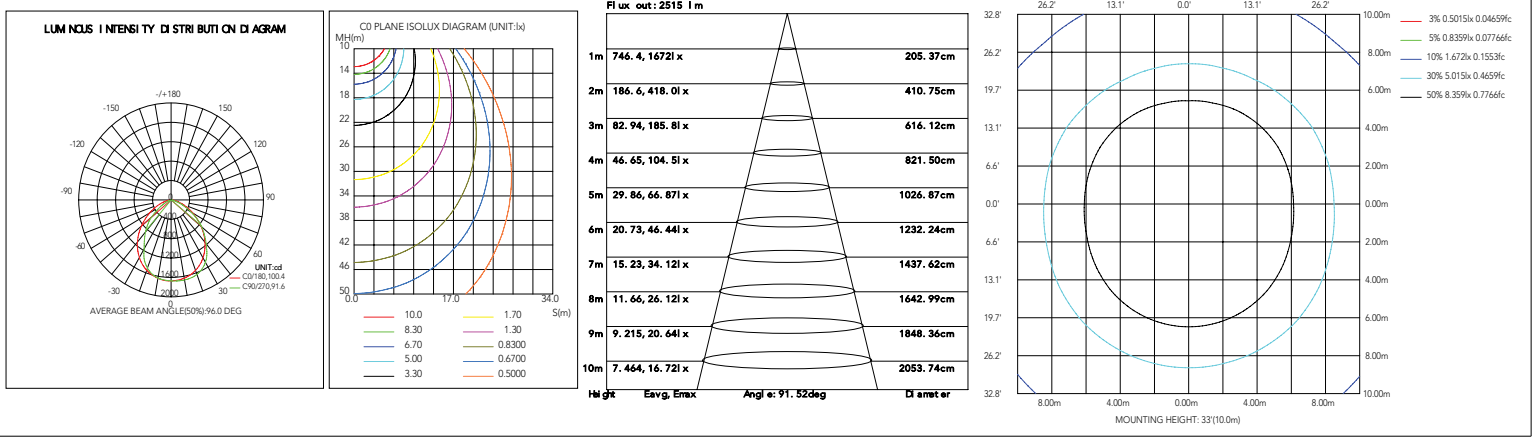



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-WPMFC-[12][18][24][30]-3CCT-UNV-BZ-PC	12W/18W/24W/30W	1675/2413/3102/3779	3000K 4000K 5000K	120-277
LL-WPMFC-[12][18][24][30]-3CCT-HV-BZ	12W/18W/24W/30W	1675/2413/3102/3779	3000K 4000K 5000K	277-480

### Accessories Ordering Information

Part #	Wattage
BRI810-B-M7	120-277V 0-10V Microwave Motion Sensor
RC-100	Remote Control 100
EM4	Emergency Battery Back Up 4W
EMC4	Emergency Battery Back Up Cold Weather 4W -4 °F to 122°F

\* Please contact LITELUME for all Custom Option Requests