



# Flood Light Extra Large Double Size



## Description

The LITELUME™ Floodlight (LL-FL) Extra Large Double Size is a high performance LED solution designed with versatility and a slim, low profile design. The rugged, die-cast aluminum housing with UV resistant powder coat finish minimizes wind load requirements and features an integral, watertight LED driver compartment along with high performance aluminum heat sinks.

Applications: Parking lots, Auto dealerships, Billboard, Façade, Wall Washing, Landscape, and general outdoor lighting.

## Fixture Information

Size:	350W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Grey (BY)
Mounting:	Yoke Mount, Tenon Mount
Lens:	High Performance Acrylic NEMA 7H*6V optics. Optional NEMA 4H*4V optics.
CRI:	80
Surge Protector:	Optional: 10 kVA
Voltage:	Standard: 120-277V
Sensor:	Standard: No sensor Custom: Button Photocell (120-277V)
Warranty:	10-Year Limited Warranty

## Performance Data

**Lumen Output:**  
48,000 to 50,000 lm

**Lumens Per Watt (typical):**  
137 to 142 lm/W

**CCT:**  
3000K  
4000K  
5000K

**Beam Angle:**  
7H\*6V  
Optional 4H\*4V

**Lifespan:**  
Up to 100,000 running hours

**Ratings & Certificates**  
UL Listed For Wet Location  
IP65 rated  
TAA Compliant/BAA Optional




## Wattage Replacement

Existing Watts	Litelume Watts
1000-1500W	350W




## Dimension

Item	Width	Length	Height	Weight
Floodlight Large Extra Large Double Size	5.23"	16.64"	19.27"	31.27 lbs

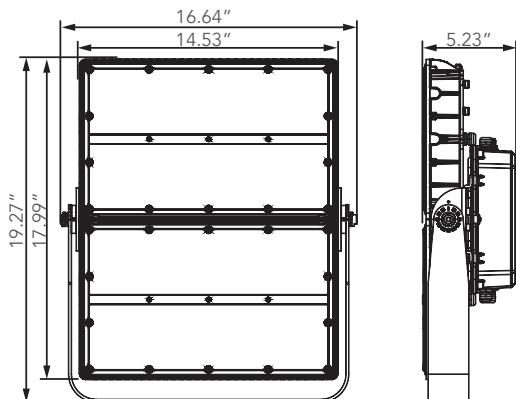


## Photometrics

7H\*6V

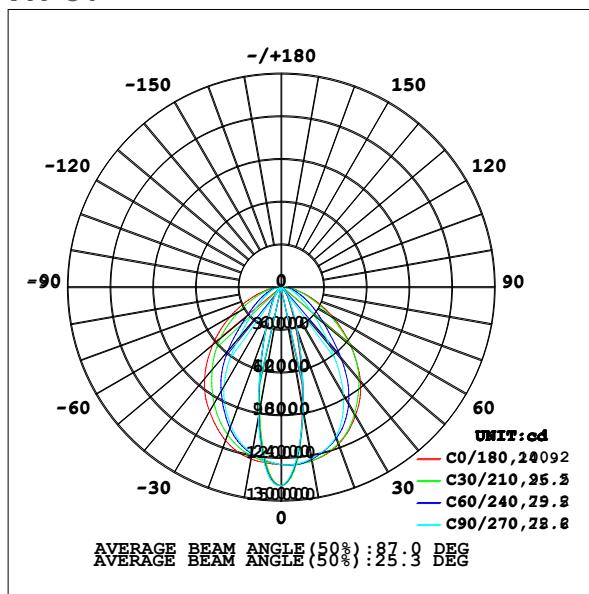

4H\*4V

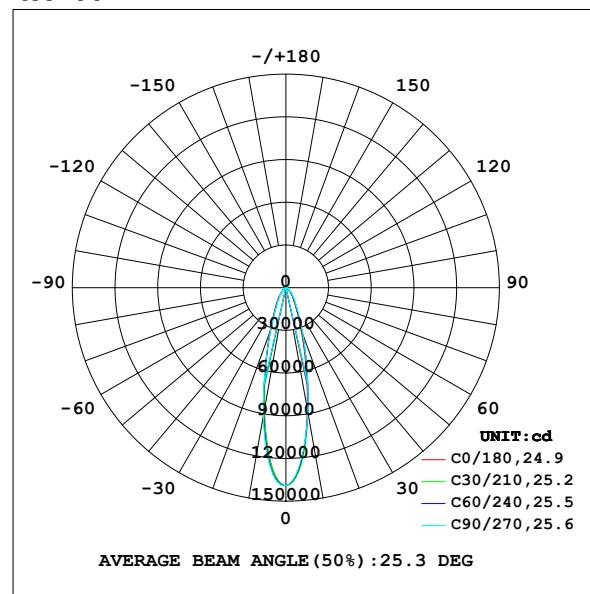

## Mounting

## Tenon Mount





Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

## Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Beam Angle
LL-FL-350-50-UNV-N76-BZ-YM	350	50000	5000	120-277	7H*6V
LL-FL-350-40-UNV-N76-BZ-YM	350	50000	4000	120-277	7H*6V
LL-FL-350-30-UNV-N76-BZ-YM	350	48000	3000	120-277	7H*6V
LL-FL-350-50-UNV-N44-BZ-YM	350	49500	5000	120-277	4H*4V
LL-FL-350-40-UNV-N44-BZ-YM	350	49500	4000	120-277	4H*4V
LL-FL-350-30-UNV-N44-BZ-YM	350	48000	3000	120-277	4H*4V

## Accessories Ordering Information

Part #	Description
PC	Button Photocell, 120-277V
FL-TM	Tenon Mount For Floodlight
SUB"UNV" WITH "480"	480 Volt

\* Please contact LITELUME for all Custom Option Requests

## Buy American Act Compliant Ordering Information

Part #	Description
BAA-FL350	Buy America Act Compliant For Floodlight 350W

\* Please contact LITELUME for all Custom Option Requests